




CP COIL PIPE TRAILER SPECS

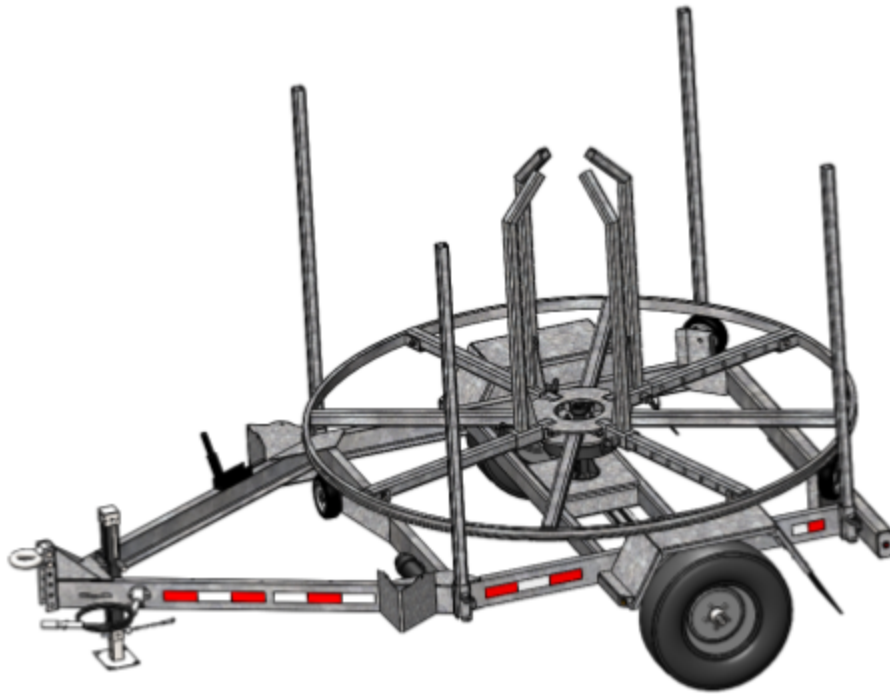

EXCLUSIVE STANDARD ADDED VALUE:

- Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
- Floating Spindle Turret Allows for Adjustability from 28" ID to 83" ID
- Turntable Holds Coils with a Height up to 48"
- (3) Turret Tire Rollers for Enhanced Stability and Smoother Operation
- Brake Easily Engages by Pulling a Hand Lever
- Low Center of Gravity
- Great Price

BUILT FOR SAFETY. BUILT FOR SPEED. *BUILT TO LAST.*

CAPACITIES

- CP1.4: 3,000 lbs. GVWR

AXLES

- CP1.4: 3K lbs. Torsion

WHEELS

- CP1.4: (2) 15 x 6JJ / 5 on 4.5 BC w/ Zeroset

TIRES

- CP1.4: (2) ST-205/75R15 LR-C Tires

BRAKES

- CP1.4: No Brakes

PAYLOAD: ALL FINAL PAYLOADS BASED ON CHOSEN MODEL AND OPTIONS**COIL WEIGHT (PAYLOAD)**

- CP1.4: 1,400 lbs. Approx.

COIL HEIGHT (from turntable): 48"

COIL DIAMETER: Fabricated ID Spokes with "Floating" Spindle 28"-83" ID Adjustability

OVERALL LENGTH: 156" Approx.

OVERALL WIDTH: 96" Approx.

OVERALL WEIGHT: Actual Trailer Weight will Vary with Options & Finishes Chosen.

STANDARD FEATURES

- Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
- Oil Bath Hubs (Greaseable Option)
- Wheel Chock Holders
- (4) Removable 2" x 2" Vertical Outside Diameter Posts
- Floating Spindle Turret Allows for Adjustability from 28" ID to 83"
- Turntable Holds Coils with a Height up to 48"
- Brake Easily Engages by Pulling a Hand Lever
- (3) Turret Tire Rollers for Enhanced Stability and Smoother Operation
- 2.50" Lunette Eye
- 8,000 lbs. Static Front Jack

STANDARD TRAILER BODY

- Heavy Duty 5" Channel Frame
- 5-Position Adjustable Hitch
- 3/8" X 36" GR70 Yellow Zinc Safety Chains with Hooks
- Fenders: 1/8" Plate

WIRING


- DOT / ICC Approved LED Lights and Conspicuity Reflective Tape
- FMVSS / CMVSS Standard 108 LED Lighting
- Sealed Beam, Rubber Mounted Stop, Turn, Tail and Marker Lights
- 100% Sealed Heat-Shrunked Wiring Connections w/ Full Loom
- Breakaway Kit with Absorbed Glass Mat (AGM) Battery

PAINT

- I.M.P.A.C.T Intense Metal pH Acid Cleaning Technology
- Hydrofluoric, Sulfuric, Phosphoric ACID Blend Cleaning Preparation
(Re-used sandblasting material can impregnate metals with oil)
- Seams Caulked
- Rust Preventative 2-Part Epoxy Primer
- Standard Colors: Red, Black, White and CAT Yellow

OPTIONS

- 10-Year Galvanized Structural Warranty (2-Year Painted)
- Aluminum or Steel Toolbox
- Wiring Connections Soldered and Sealed w/ Heat Shrink Tubing
- Plug-and-Play Sealco Wiring Harness
- Wheel Chocks: Rubber or All Weather Galvanized Grip Strut
- Spare Tire and Mount
- All Stainless Steel Fasteners (1/2" and under)
- Line Tamer / Pipe Straightener w/ Radial Articulating Arm
- Tracer Wire Holder
- Truck-Lite Lighting

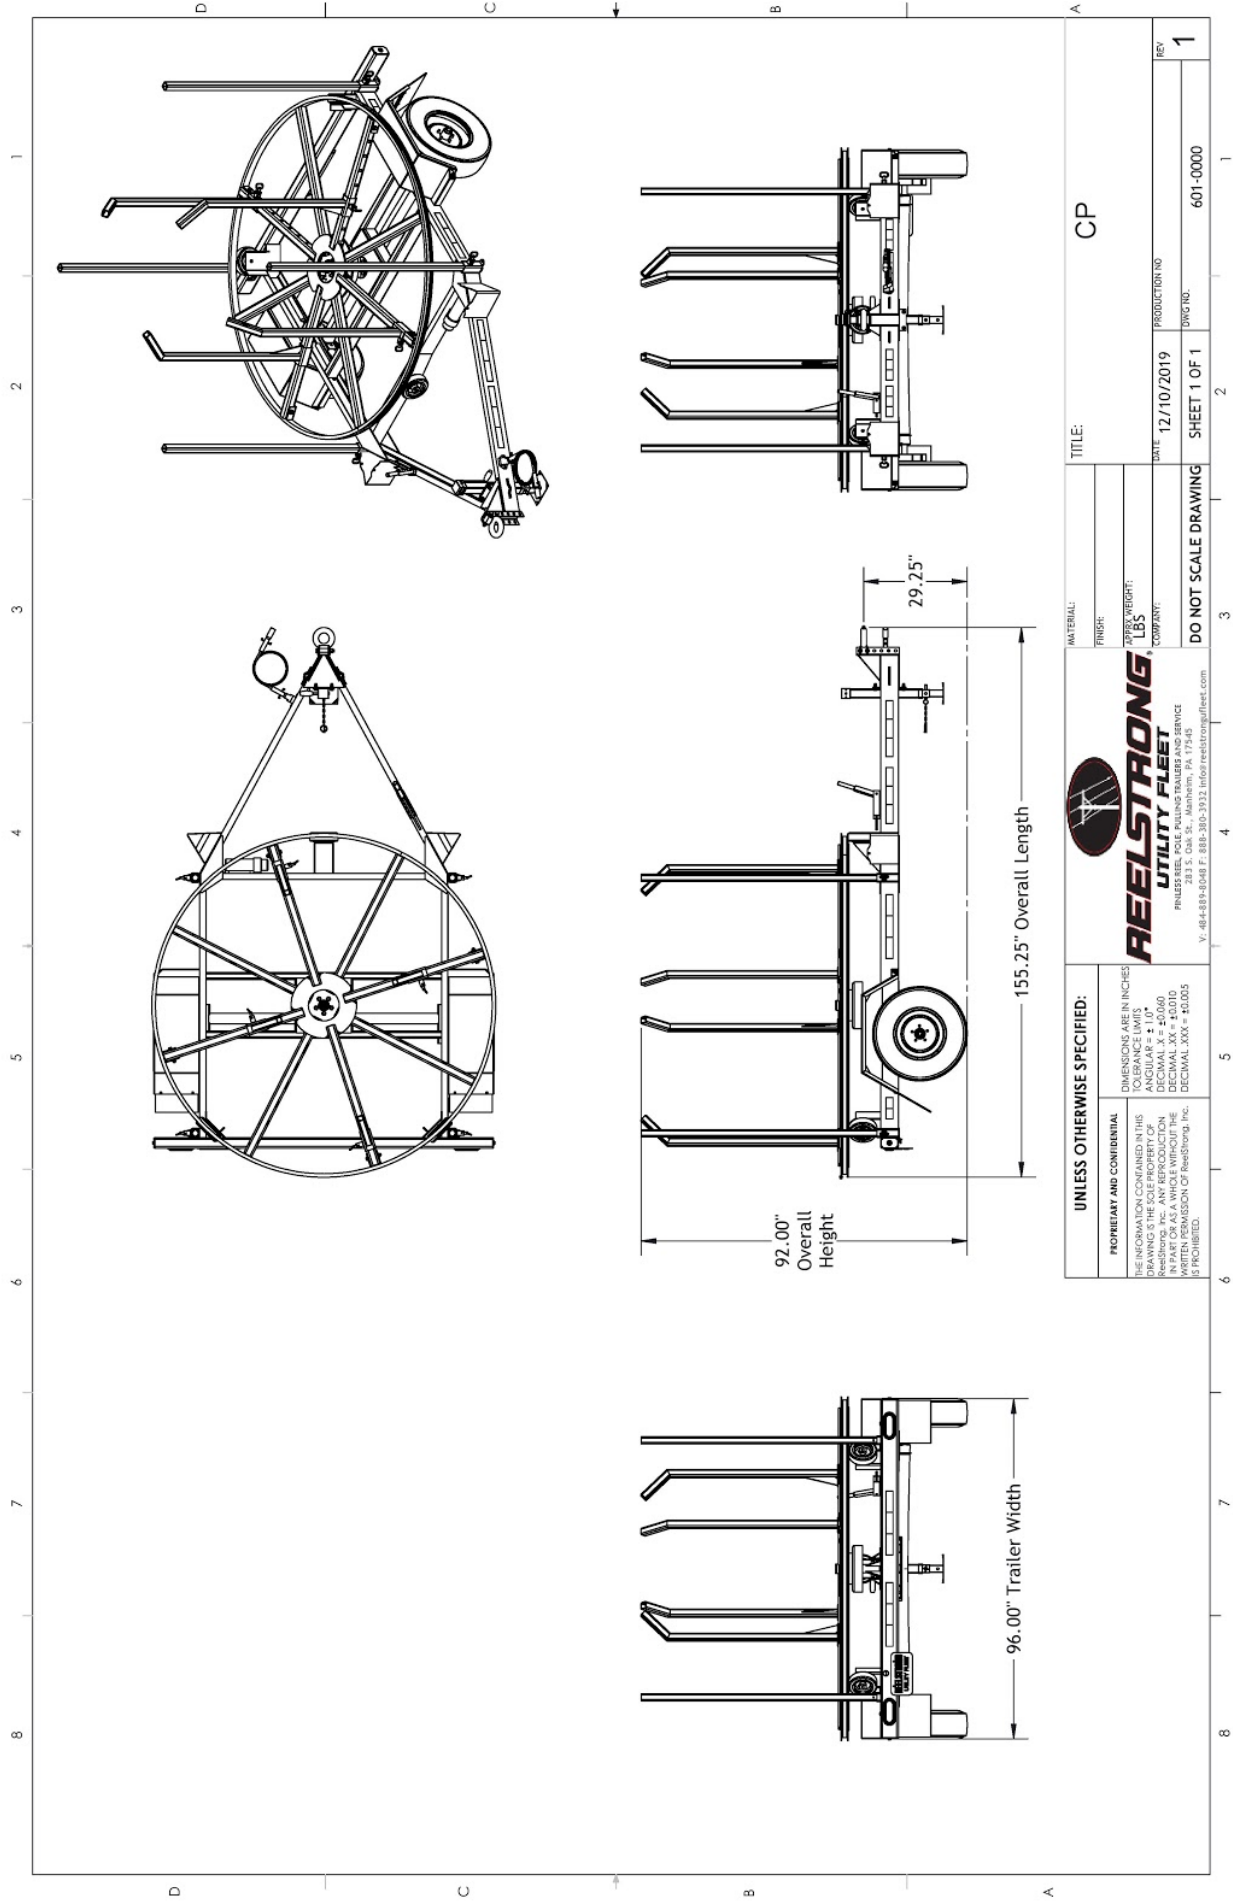

| | | | |
|---|--------------------------|----------------------|-------------------|
| UNLESS OTHERWISE SPECIFIED: | | TITLE: CP | |
| PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ReelStrong, Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ReelStrong, Inc. IS PROHIBITED. | DIMENSIONS ARE IN INCHES | | MATERIAL: |
| | TOLERANCE LIMITS: | | FINISH: |
| | ANGULAR = ± 1.0° | | JOINT WEIGHT: LBS |
| | DECIMAL .X = ±0.060 | | COMPANY: |
| | DECIMAL .XXX = ±0.005 | | DATE: 12/10/2019 |
| | | PRODUCTION NO | REV |
| | | DO NOT SCALE DRAWING | 1 |
| | | SHEET 1 OF 1 | 601-0000 |