




**PT STEERABLE HEAVY DUTY LIFETIME WARRANTY
MEGA-ROLLER™ w/ SELF-SECURING TONGUE-LOCK POLE
TRAILER SPECIFICATION**

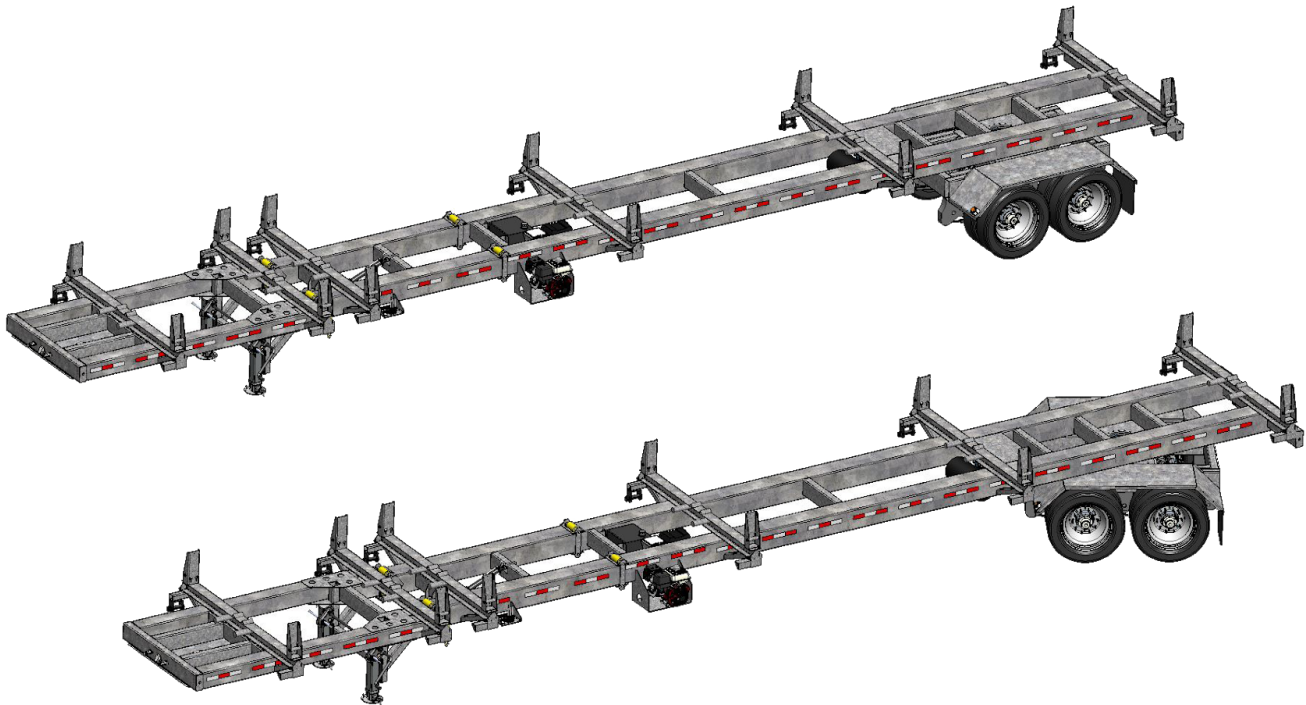

LOWEST TOTAL COST OF OWNERSHIP (TCO) FROM:

- **LIFETIME WARRANTY MEGA-ROLLER™** (6 Roller Patent Pending) w/ Bronze Super Alloy Bearings Provides a Smooth “ONE MAN OPERATION” of the Tongue. NO TRUCK NEEDED to Extend or Retract. NO WEAR PADS TO MAINTAIN OR REPLACE.
- SELF-SECURING SECURELOCK™ Tongue-lock. No Pins to Lose.
- **PRACTICAL:** No Expensive, Unnecessary Bronze Components, yet we Don't Cut Corners and Provide Premium, Heavy Duty, Top-Quality Latches, Hardware, Fittings and Components.
- Non-Binding/Freezing EZ Slide Pole Centering Stanchions. Replaces Rusted/Seized Lever Lock Stanchions and Expensive Bronze.
- Heavy Duty yet Simple 5” H-Beam Pole Seats

BUILT FOR SAFETY. BUILT FOR SPEED. BUILT TO LAST.

CAPACITIES

- PT50: 60,000 lbs. GVWR @ 20% Tongue Weight

AXLES

- PT50: Tandem 25K lbs. Sprung

WHEELS

- PT50: (8) 22.5 x 7.50 HC / 8 on 275mm BC w/ 5.60 Outset

TIRES

- PT50: (8) 255/70R22.5 LR-H Tires

BRAKES

- PT50: 12.25" x 7.50" Air

LENGTH Retracted / Extended Lengths:

- PT50: 48' / 56' / 64' / 73'
- **Optional** Additional / Less Extension Increments Available

WIDTH:

- PT50: 96.75"

WEIGHT: Actual Trailer Weight will Vary with Options & Finishes Chosen.

STANDARD FEATURES

- **LIFETIME WARRANTY MEGA-ROLLER 6-ROLLER** Telescoping Tongue (NO WEAR PADS TO REPLACE) (2 sets per trailer)
- **SELF-SECURING SECURELOCK™** Tongue Lock Roller System (No Loose Pin) (2 per trailer)
- **NON-BINDING/FREEZING EZ-SLIDE POLE-CENTERING STANCHIONS**
- Steerable Rear Dolly that Rotates 27 Degrees Each Way
- 13 HP HONDA Engine Hydraulic Power Pack Comes STANDARD w/ ENGINE COVER, 15 Gallon Reservoir, Replaceable Oil Filter, Pressure Gauge and Solar Fade Resistant

Plastic

- Hydraulically-Driven Steering, Jack Lift, and Jack Pivot.
- Dual 12,000 lbs. Static Jacks w/ Spring Return for Landing Gear
- 20" Slewing Ring w/ Worm-gear for Steering
- Internally Routed Air and Electrical Lines
- Ladar Wireless Remote
- Oil Bath Hubs
- Air Brakes
- Wheel Chock Holders
- Adjustable Spring Pads

—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

STANDARD FEATURES (cont.)

- Slipper Springs
- Reinforced Spring Hangers
- Wheel Chock Holders
- ALL Pole Rests: 5" H Beam
- Winch Binders w/ Ratcheting Breaker Bar (**BOA Crank Winch Optional**)

STANDARD TRAILER BODY

- Dual 8" X 8" X 1/4" ("Square" for Max Equal Lateral and Vertical Strength) Male Extendable Tongue Tubes. (Compare to Competition)
- Dual Heavy Duty 10" X 10" X 1/4" Wall Female Structural Tubes
- Oversized Precision Rollers w/ Bronze Bearings
- Kingpin Fifth Wheel
- 1/2" GR70 Yellow Zinc Safety Chains with Hooks
- Removable Male Extension Tongue
- Fenders: 1/8" Fabricated Diamond Plate

WIRING

- DOT / ICC-- FMVSS / CMVSS Approved LED ULTRA- HIGH VISIBILITY 180 DEGREE BULLET Marker and Clearance Lights
- LED Sealed Beam Rubber Mounted Stop, Turn, Tail and Marker Lights
- **Internal Cat Track** Protects Wiring (and air brakes if applicable)
- Removable Rear Access Door to Access Cat Track and Wiring
- Breakaway Kit with Absorbed Glass Mat (AGM) Battery
- 100% Sealed Heat-Shrunked Wiring Connections w/ Full Loom
- FULLY PROTECTED 7 or 6 Way Female Plug acts as Junction Box Recessed in FRAME RAIL. No Easily Damaged Plastic Junction Boxes

PAINT

- I.M.P.A.C.T Intense Metal pH Acid Surface Prep (Superior to sandblasting that can infuse metal w/ oil)
- Seams Caulked
- Rust Preventative 2-Part Epoxy Primer
- Two-Part Polyurethane Topcoats (2 topcoats)
- Standard Colors: White and CAT Yellow (Custom Available)

OPTIONS

- 10-Year Galvanized Structural Warranty (2-Year Painted)
- BOA Hand Operated Ratcheting Pole Strap Winch for SAFETY and Ultra Ease-of-use
- Lever Lock Stanchions
- Wiring Connections Soldered and Sealed w/ Heat Shrink Tubing
- Plug-and-Play Sealco Wiring Harness

—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

OPTIONS (cont.)

- Lever Lock Stanchions
- Wheel Chocks: Rubber or All Weather Galvanized Grip Strut
- Spare Tire and Mount
- Extension Intervals to Customer Spec
- Solar Charged Breakaway Kit
- All Stainless Steel Fasteners (½” and under)
- Anti-Skid/Anti-Glare Sand Paint on all Walking Surfaces
- Various Trailer Light Plugs (Customer Choice)
- Truck-Lite Lighting

OPTIONAL LIGHT BAR

- All TIG Welded Aluminum w/ Claw-Tooth for Superior Grip
- Contains (4) Four 4” Stop/Turn / Tail Rubber Mounted Sealed Beam LED Lights
- (3) Three Center ID Marker Lights
- (2) Two Side Marker Lights
- 7-Way REMOVABLE, DOUBLE ENDED NON-HARD WIRED Light Plug (to prevent yank-out damage and for easy maintenance) (7-Way ILO 4-Way is easier to source and more readily available for you)
- 35’ Standard Electric Cable Length with a 7-Way Connector Plug

—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

