



PT HEAVY DUTY LIFETIME WARRANTY MEGA-ROLLER™ w/ SELF-SECURING TONGUE-LOCK POLE TRAILER SPECIFICATION



MEGA-ROLLER™ w/
SECURELOCK™ SYSTEM
(PATENT PENDING)

LOWEST TOTAL COST OF OWNERSHIP (TCO) FROM:

- **LIFETIME WARRANTY MEGA-ROLLER™** (6 Roller Patent Pending) w/ Bronze Super Alloy Bearings Provides a Smooth "ONE MAN OPERATION" of the Tongue. NO TRUCK NEEDED to Extend or Retract. NO WEAR PADS TO MAINTAIN OR REPLACE.
- SELF-SECURING SECURELOCK™ Tongue-lock. No Pins to Lose.
- **PRACTICAL:** No Expensive, Unnecessary Bronze Components, yet we Don't Cut Corners and Provide Premium, Heavy Duty, Top-Quality Latches, Hardware, Fittings and Components.
- Non-Binding/Freezing EZ Slide Pole Centering Stanchions. Replaces Rusted/Seized Lever Lock Stanchions and Expensive Bronze.
- Heavy Duty yet Simple 5" H-Beam Pole Seats

BUILT FOR SAFETY. BUILT FOR SPEED. BUILT TO LAST.

CAPACITIES

- PT24: 27,600 lbs. GVWR @ 15% Tongue Weight
- PT30: 34,500 lbs. GVWR @ 15% Tongue Weight

AXLES

- PT24: Tandem 12K lbs. Sprung
- PT30: Tandem 15K lbs. Sprung

WHEELS

- PT24: (8) 16 x 6K / 8 on 6.5 BC w/ 5.50 Outset
- PT30: (8) 17.5 x 6.75 HC / 8 on 275mm BC w/ 5.60 Outset

TIRES

- PT24: (8) ST-235/85R16 LR-E Tires
- PT30: (8) ST-215/75R17.5 LR-H Tires

BRAKES

- PT24: 12.25" x 5.00" Electric w/ Safety Breakaway Kit
- PT30: 12.25" x 5.00" Electric w/ Safety Breakaway Kit

LENGTH

Retracted / Extended Lengths:

- PT24: 33' / 38' / 44' / 50'
- PT30: 33' / 38' / 44' / 50'
- **Optional** Additional / Less Extension Increments Available

WIDTH: See Drawings Below

WEIGHT: Actual Trailer Weight will Vary with Options & Finishes Chosen.

CARGO BED

- PT24: 100" X 43" (Customizable)
- PT30: 100" X 43" (Customizable)

STANDARD FEATURES

- **LIFETIME WARRANTY MEGA-ROLLER 6-ROLLER** Telescoping Tongue (NO WEAR PADS TO REPLACE)
- **SELF-SECURING SECURELOCK™** Tongue Lock Roller System (No Loose Pin)
- **NON-BINDING/FREEZING EZ-SLIDE POLE-CENTERING STANCHIONS**
- Oil Bath Hubs (Greaseable Option All)
- Electric Brakes
- Wheel Chock Holders
- Adjustable Spring Pads

—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

STANDARD FEATURES (cont.)

- Slipper Springs
- Reinforced Spring Hangers
- Wheel Chock Holders
- ALL Pole Rests: 5" H Beam
- Winch Binders w/ Ratcheting Breaker Bar (**BOA Crank Winch Optional**)

STANDARD TRAILER BODY

- 6" X 6" X 3/8" ("Square" for Max Equal Lateral and Vertical Strength) Male Extendable Tongue. (Compare to Competition)
- Heavy Duty 6" X 6" X 3/8" Wall Male Extendable Tongue
- Heavy Duty 8" X 8" X 1/4" Wall Female Structural Tube
- Oversized Precision Rollers w/ Bronze Bearings
- 7-Position Adjustable Hitch
- 1/2" X 42" GR70 Yellow Zinc Safety Chains with Hooks
- Removable Male Extension Tongue
- Standard Cargo Area
- 12,000 lbs. Static Front Jack w/ Spring Return
- Fenders: 1/8" Fabricated Diamond Plate

WIRING

- DOT / ICC-- FMVSS / CMVSS Approved LED ULTRA- HIGH VISIBILITY 180 DEGREE BULLET Marker and Clearance Lights
- LED Sealed Beam Rubber Mounted Stop, Turn, Tail and Marker Lights
- **Internal Cat Track** Protects Wiring (and air brakes if applicable)
- Removable Rear Access Door to Access Cat Track and Wiring
- Breakaway Kit with Absorbed Glass Mat (AGM) Battery
- 100% Sealed Heat-Shrunked Wiring Connections w/ Full Loom
- FULLY PROTECTED 7 or 6 Way Female Plug acts as Junction Box Recessed in FRAME RAIL. No Easily Damaged Plastic Junction Boxes

PAINT

- I.M.P.A.C.T Intense Metal pH Acid Surface Prep (Superior to sandblasting that can infuse metal w/ oil)
- Seams Caulked
- Rust Preventative 2-Part Epoxy Primer
- Two-Part Polyurethane Topcoats (2 topcoats)
- Standard Colors: White and CAT Yellow (Custom Available)

OPTIONS

- 10-Year Galvanized Structural Warranty (2-Year Painted)
- BOA Hand Operated Ratcheting Pole Strap Winch for SAFETY and Ultra Ease-of-use


—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

OPTIONS (cont.)

- Air Brakes w/ ABS
- Lever Lock Stanchions
- Wiring Connections Soldered and Sealed w/ Heat Shrink Tubing
- Plug-and-Play Sealco Wiring Harness
- Lever Lock Stanchions
- Wheel Chocks: Rubber or All Weather Galvanized Grip Strut
- Spare Tire and Mount
- Extension Intervals to Customer Spec
- Solar Charged Breakaway Kit
- Quick-Rotate Swivel Jack
- 16" Long 6-Bolt Hitch Extension (w/ 52" Safety Chains and Breakaway Cable Extension)
- 3" Lunette Eye
- All Stainless Steel Fasteners (½" and under)
- Anti-Skid/Anti-Glare Sand Paint on all Walking Surfaces
- Various Trailer Light Plugs (Customer Choice)
- Truck-Lite Lighting

OPTIONAL LIGHT BAR

- All TIG Welded Aluminum w/ Claw-Tooth for Superior Grip
- Contains (4) Four 4" Stop/Turn / Tail Rubber Mounted Sealed Beam LED Lights
- (3) Three Center ID Marker Lights
- (2) Two Side Marker Lights
- 7-Way REMOVABLE, DOUBLE ENDED NON-HARD WIRED Light Plug (to prevent yank-out damage and for easy maintenance) (7-Way ILO 4-Way is easier to source and more readily available for you)
- 35' Standard Electric Cable Length with a 7-Way Connector Plug

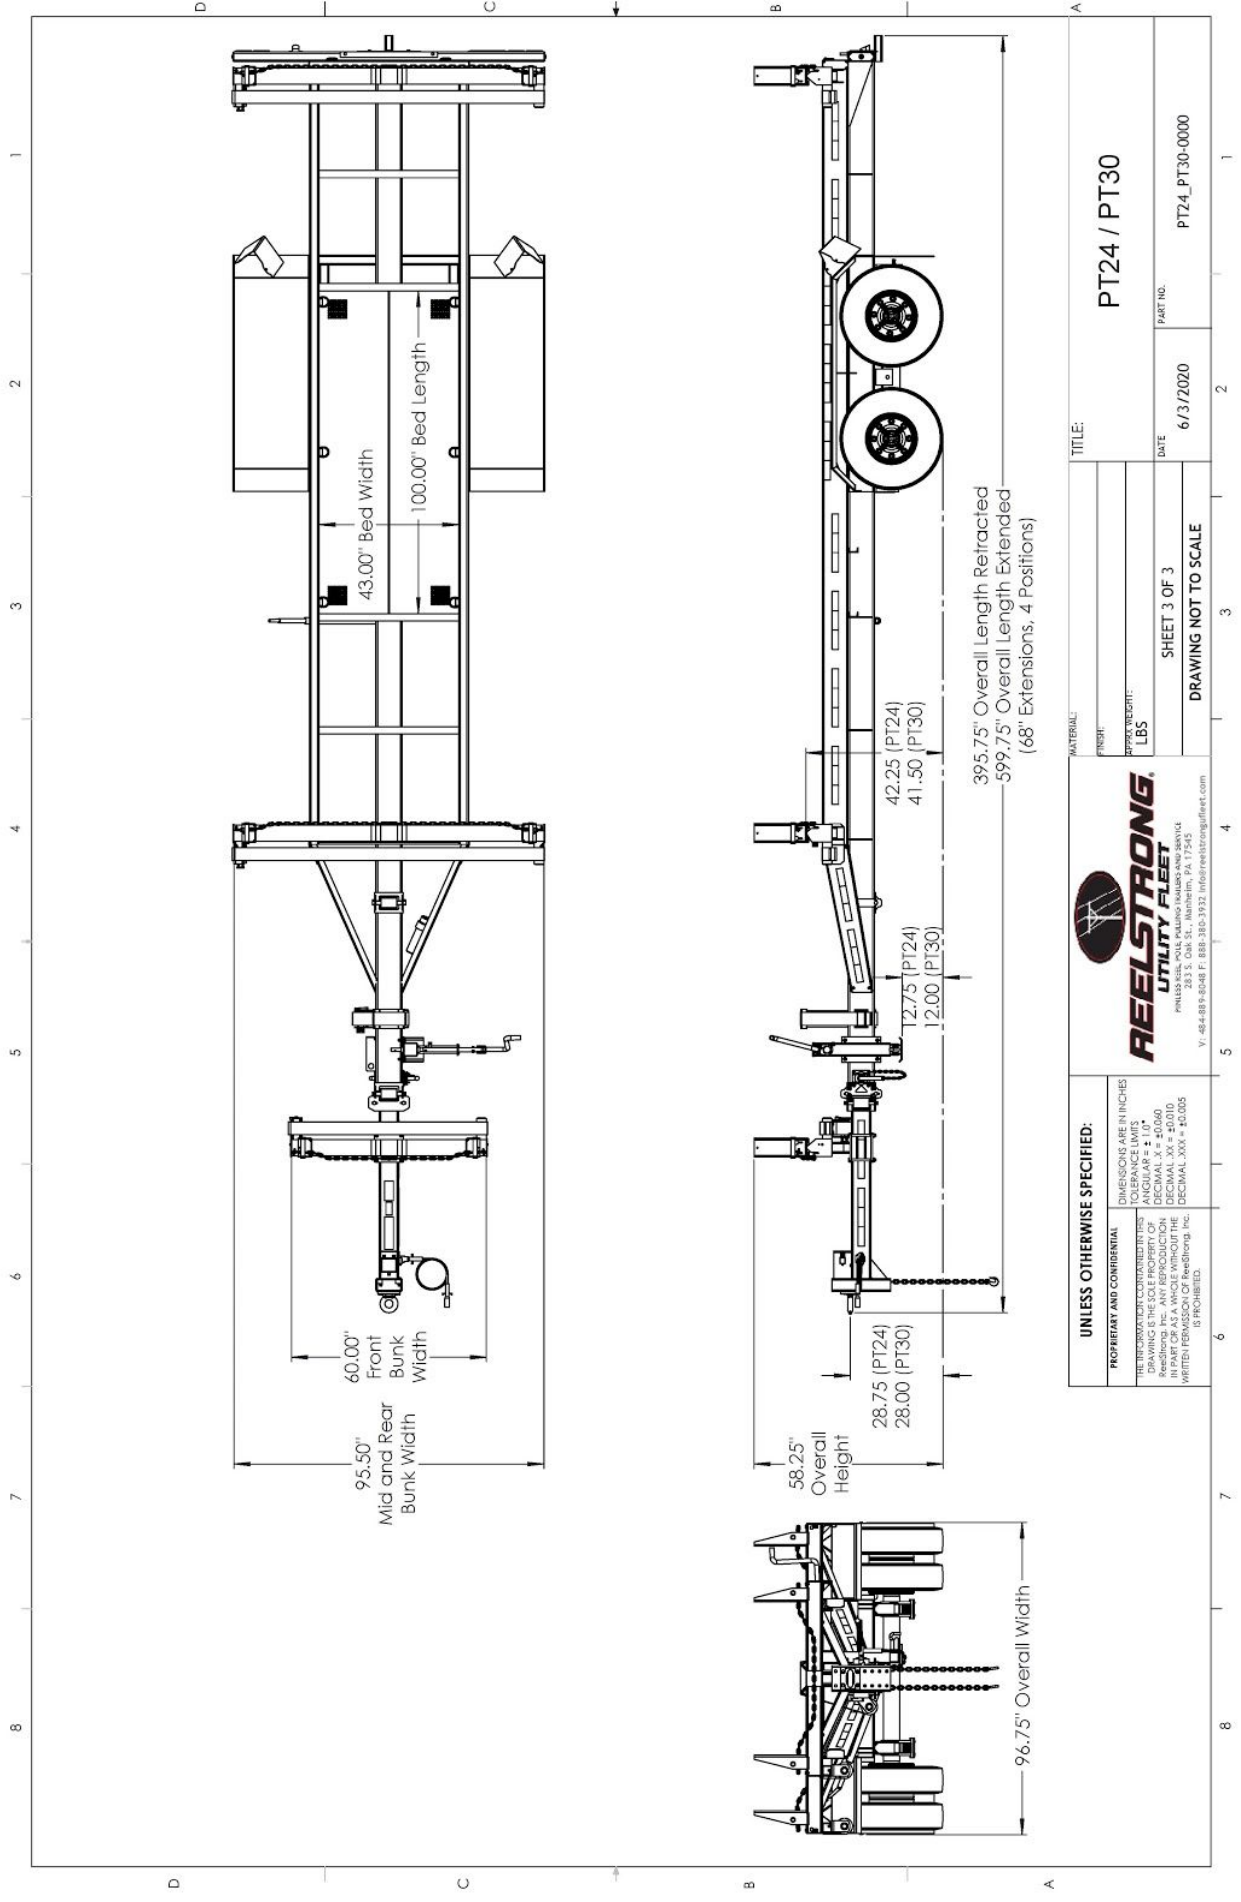

UNLESS OTHERWISE SPECIFIED:		DIMENSIONS ARE IN INCHES	
TOLERANCE LIMITS		TOLERANCE LIMITS	
ANGULAR ± 1.0°		ANGULAR ± 1.0°	
DECIMAL .XX ± .005		DECIMAL .XX ± .005	
FRACTIONAL XXX ± .0005		FRACTIONAL XXX ± .0005	
WRITTEN PERMISSION OF Reelstrong, Inc. IS PROHIBITED.		WRITTEN PERMISSION OF Reelstrong, Inc. IS PROHIBITED.	
REELSTRONG UTILITY FLEET		REELSTRONG UTILITY FLEET	
PUNISH REEL PULLING HAZARDS AND SERVICE		PUNISH REEL PULLING HAZARDS AND SERVICE	
Y: 484-895-8248 F: 888-316-3932 info@reelstrongfleet.com		Y: 484-895-8248 F: 888-316-3932 info@reelstrongfleet.com	
TITLE:		PT24 / PT30	
MATERIAL:		PT24 / PT30	
FINISH:		PT24 / PT30	
SUPPLY WEIGHT:		PT24 / PT30	
LBS		PT24 / PT30	
SHEET 3 OF 3		PT24 / PT30	
DRAWING NOT TO SCALE		PT24 / PT30	
DATE		PT24 / PT30	
6/3/2020		PT24 / PT30	
PART NO.		PT24 / PT30	
PT24_PT30-0000		PT24_PT30-0000	