



**CPTD LIFETIME WARRANTY MEGA-ROLLER™ w/ SELF-SECURING  
SECURELOCK™ COMBINATION REEL / POLE / CARGO DUMP  
TRAILER SPECS**



**EXCLUSIVE STANDARD ADDED VALUE:**

- SECURELOCK™ Technology Provides Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
- MEGA-ROLLER™ Tongue Extension Mechanism with Self-Lubricating Super Oilite Bearings Provides a Smooth “ONE MAN OPERATION” of the Extendable Tongue Unit. NO TRUCK NEEDED to Extend or Retract Tongue!
- ADJUSTABLE Front Pole Seat, Featuring EZ Slide Stanchions. No More Rusted / Seized Lever Lock Stanchions.

***BUILT FOR SAFETY. BUILT FOR SPEED. BUILT TO LAST.***

## CAPACITIES

- CPTD16: 18,200 lbs. GVWR @ 15% Tongue Weight
- CPTDL16: 18,200 lbs. GVWR @ 15% Tongue Weight
- CPTD20: 22,100 lbs. GVWR @ 15% Tongue Weight
- CPTDL20: 22,100 lbs. GVWR @ 15% Tongue Weight

## AXLES

- CPTD16: Tandem 8K lbs. Torsion
- CPTDL16: Tandem 8K lbs. Torsion
- CPTD20: Tandem 10K lbs. Sprung
- CPTDL20: Tandem 10K lbs. Sprung

## WHEELS (per axle)

- CPTD16: (4) 16 x 6K / 8 on 6.5 BC w/ ZeroSet
- CPTDL16: (4) 16 x 6K / 8 on 6.5 BC w/ ZeroSet
- CPTD20: (4) 17.50 x 6.75 HC / 8 on 6.5 BC w/ 0.19 Inset
- CPTDL20: (4) 17.50 x 6.75 HC / 8 on 6.5 BC w/ 0.19 Inset

## TIRES (per axle)

- CPTD16: (4) ST-235/85R16 LR-F Tires
- CPTDL16: (4) ST-235/85R16 LR-F Tires
- CPTD20: (4) ST-215/75R17 LR-H Tires
- CPTDL20: (4) ST-215/75R17 LR-H Tires

## BRAKES (per axle)

- CPTD16: 12.25" x 3.38" Electric w/ Safety Breakaway Kit
- CPTDL16: 12.25" x 3.38" Electric w/ Safety Breakaway Kit
- CPTD20: 12.25" x 3.38" Electric w/ Safety Breakaway Kit
- CPTDL20: 12.25" x 3.38" Electric w/ Safety Breakaway Kit

## PAYLOAD: ALL FINAL PAYLOADS BASED ON CHOSEN MODEL AND OPTIONS

### OVERALL LENGTH Retracted / Extended Lengths:

- CPTD16: 22' / 27' / 32'
- CPTDL16: 26' / 33' / 40'
- CPTD20: 22' / 27' / 32'
- CPTDL20: 26' / 33' / 40'
- **Optional** Additional / Less Extension Increments Available

### OVERALL WIDTH: 96"

### OVERALL WEIGHT: Actual Trailer Weight will Vary with Options & Finishes Chosen.

—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

**POLE SEAT HEIGHT: 45"**

## **CARGO BED**

- CPTD16: 114" L X 63.75" W x 15" H (Customizable)
- CPTDL16: 144" L X 63.75" W x 15" H (Customizable)
- CPTD20: 114" L X 63.75" W x 15" H (Customizable)
- CPTDL20: 144" L X 63.75" W x 15" H (Customizable)

## **STANDARD FEATURES**

- **LIFETIME WARRANTY** MEGA-ROLLER EXTEND / RETRACT SYSTEM  
(NO WEAR PADS TO REPLACE!)
- **SECURELOCK™** Tongue Lock Roller System
- NO-BIND EZ-SLIDE STANCHIONS
- Oil Bath Hubs (Greaseable Option All)
- Electric Brakes
- Wheel Chock Holders
- Hydraulic Dump Bed (Dual Cylinder Design)

## **POLE SECUREMENT**

- Pole Rests: 5" H Beam (Level Lock Stanchions Optional)
- Front Pole Rests: 5" H Beam (Lever Lock Stanchions Optional)
- Winch Binders, Ratcheting Breaker Bar and Bar Pocket

## **STANDARD TRAILER BODY**

- Heavy Duty 6" X 6" X ¼" Wall Male Extendable Tongue
- Heavy Duty 8" X 8" X ¼" Wall Female Structural Tube
- Heavy Duty 7" X 3" X ¼" Frame
- Oversized Precision Rollers w/Bronze Bearings
- 7 Position Adjustable Hitch
- ¾" X 36" GR70 Yellow Zinc Safety Chains with Hooks
- Removable Male Male Extension Tongue
- Standard Cargo Area
- 12,000 lbs. Static Front Jack w/ Spring Return

## **FRONT POLE SEAT OPTIONS (Mounted on Male Tongue)**

- 48" Wide 5" H-Beam Pole Seat w/EZ-Slide Stanchions (Standard)
- 60" Wide 5" H-Beam Pole Seat w/EZ-Slide Stanchions (Optional)
- 96" Wide 5" H-Beam Pole Seat w/EZ-Slide Stanchions (Optional)

## **WIRING**

- DOT / ICC Approved LED Lights and Conspicuity Reflective Tape

*—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.*

## **WIRING (cont.)**

- Internal Cat Track Protects Wiring (and air brakes if applicable)
- Removable Rear Access Door for Cat Track and Wiring
- Sealed Beam, Rubber Mounted Stop, Turn, Tail and Marker Lights
- Plug-and-Play Sealco Wiring Harness
- Breakaway Kit with Absorbed Glass Mat (AGM) Battery

## **PAINT**

- I.M.P.A.C.T Intense Metal pH Acid Cleaning Technology
- Hydrofluoric, Sulfuric, Phosphoric ACID Blend Cleaning Preparation (Re-used sandblasting material can impregnate metals with oil)
- Seams Caulked
- Rust Preventative 2-Part Epoxy Primer
- Standard Colors: Red, Black, White and CAT Yellow

## **OPTIONS**


- 10-Year Galvanized Structural Warranty (2-Year Painted)
- 10K-HD / 15K / 20K Axles Available w/ Air Brakes
- Anti-Lock Brakes (ABS)
- 3" Lunette Eye
- Lever Lock Stanchions
- Wiring Connections Soldered and Sealed w/ Heat Shrink Tubing
- Jack Handle Extension for Full Width (96") Pole Seat
- Wheel Chocks: Rubber or All Weather Galvanized Grip Strut
- Spare Tire and Mount
- 6D-Rings Front, Center and Rear for Cargo / Transformers
- Front Removable / Adjustable Pole Seat Mounted on Front Male Tongue (Not Recommended)
- Extension Configurations: Customizable (additional / less extension increments available)
- Solar Charged Breakaway Kit
- Full Size-Opening Toolbox Package
- Full Top-Opening Toolbox Package
- Quick-Rotate Swivel Jack
- Removable Reel Stands / Power Winder / Tension Brake (Sold Separately) (manually liftable) w/ Centering Collars and Lifting Lugs
- 3,300 or 3,900 ft/lbs Hydraulic Power Winder (Shown with Capstan & Adapter) (Comes Standard w/ 2-7/16" Universal Adapter for Capstan and Power Reel Attachments)
- 7 Inch General Purpose Capstan
- Collapsible Power Reel
- Auxiliary Hydraulic Quick-Connect Ports

**OPTIONS (cont.)**

- 16" Bronze Alloy Ventilated Reel Brake
- 20" Bronze Alloy Ventilated Reel Brake
- 16" Hitch Extension
- 13 HP Honda Engine Hydraulic Power Unit
- Engine Cover
- All Stainless Steel Fasteners (½" and under)
- Anti-Skid/Anti-Glare Sand Paint on all Walking Surface
- Truck / Trailer Electric Wiring Socket: Customer Choice
- Custom 10' Cargo Bed ILO Standard 12' Cargo Bed

**OPTIONAL LIGHT BAR**

- All TIG Welded Aluminum
- Contains (4) Four 4" Stop/Turn / Tail Rubber Mounted Sealed Beam LED Lights
- (3) Three Center ID Marker Lights
- (2) Two Side Marker Lights
- 4-Way Die Cast Connector
- 35' Standard Electric Cable Length with a 4-Way Connector Plug

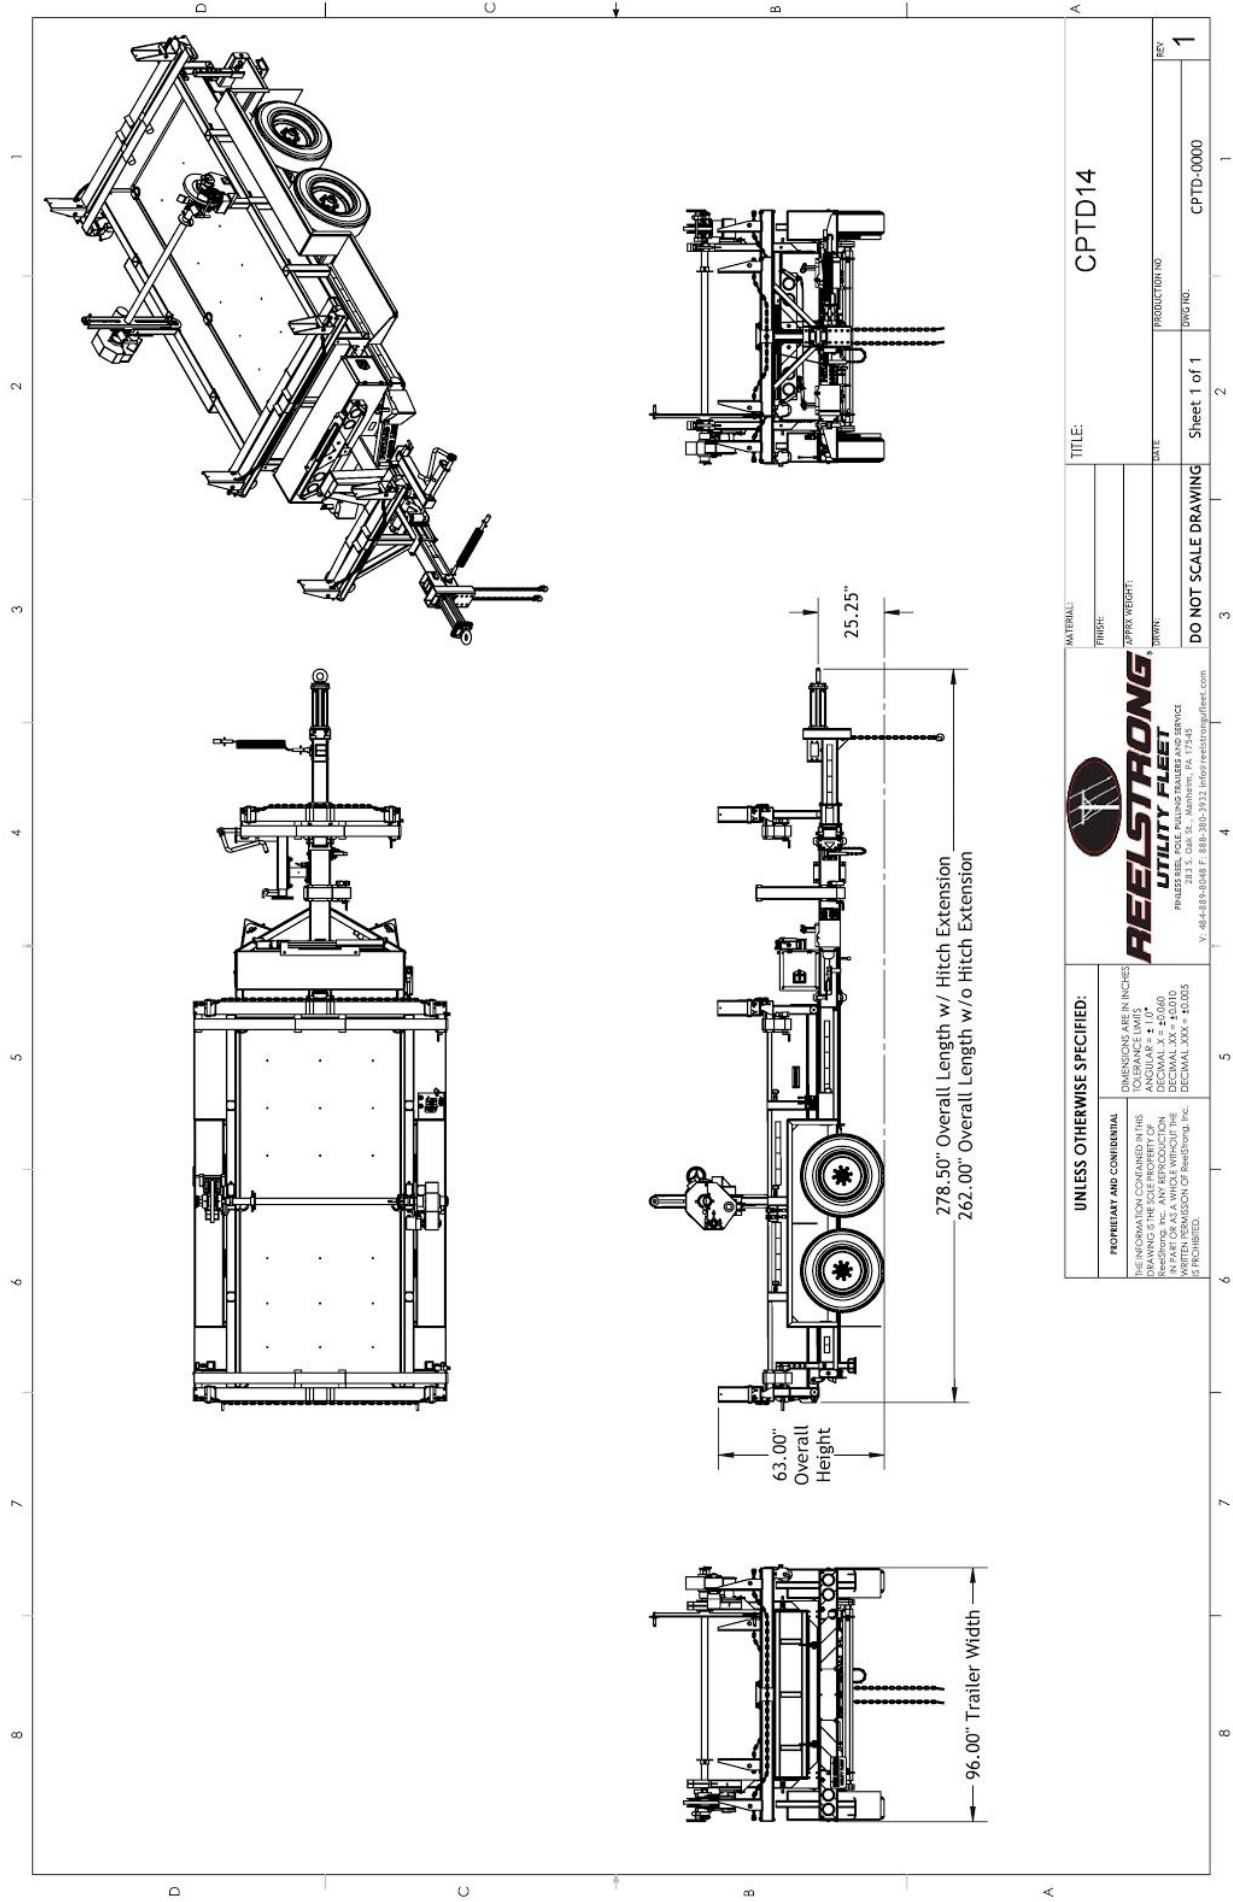

|                                                                                |  |                                                                                |  |                                                                                |  |
|--------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------|--|
| UNLESS OTHERWISE SPECIFIED:                                                    |  | DIMENSIONS ARE IN INCHES                                                       |  | TOLERANCE LIMITS                                                               |  |
| PROPRIETARY AND CONFIDENTIAL                                                   |  | THE INFORMATION CONTAINED IN THIS                                              |  | ANGULAR $\pm 1.0^\circ$                                                        |  |
| DRAWING IS THE SOLE PROPERTY OF                                                |  | REELSTRONG, INC. ANY REPRODUCTION                                              |  | DECIMAL $\pm 0.060$                                                            |  |
| WITHOUT WRITTEN PERMISSION OF REELSTRONG, INC.                                 |  | IS PROHIBITED.                                                                 |  | DECIMAL $\pm 0.005$                                                            |  |
| REELSTRONG UTILITY FLEET                                                       |  | PHILADELPHIA, PA 19104                                                         |  | V. 484-889-6248 F. 888-383-3932                                                |  |
| E-MAIL: <a href="mailto:info@reelstrongfleet.com">info@reelstrongfleet.com</a> |  | E-MAIL: <a href="mailto:info@reelstrongfleet.com">info@reelstrongfleet.com</a> |  | E-MAIL: <a href="mailto:info@reelstrongfleet.com">info@reelstrongfleet.com</a> |  |
| MATERIAL:                                                                      |  | FINISH:                                                                        |  | TYPICAL WEIGHT:                                                                |  |
| TITLE:                                                                         |  | DATE:                                                                          |  | DRAWING NO:                                                                    |  |
| CPTD14                                                                         |  | Sheet 1 of 1                                                                   |  | CPTD-0000                                                                      |  |
| DO NOT SCALE DRAWING                                                           |  | REV                                                                            |  | 1                                                                              |  |