



**CPT LIFETIME WARRANTY MEGA-ROLLER™ w/ SELF-SECURING
SECURELOCK™ COMBINATION REEL / POLE / CARGO TRAILER
SPECS**



EXCLUSIVE STANDARD ADDED VALUE:

- SECURELOCK™ Technology Provides Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
- MEGA-ROLLER™ Tongue Extension Mechanism with Self-Lubricating Super Oilite Bearings Provides a Smooth “ONE MAN OPERATION” of the Extendable Tongue Unit. NO TRUCK NEEDED to Extend or Retract Tongue!
- ADJUSTABLE Front Pole Seat, Featuring EZ Slide Stanchions. No More Rusted / Seized Lever Lock Stanchions.

BUILT FOR SAFETY. BUILT FOR SPEED. BUILT TO LAST.

CAPACITIES

• CPT16:	16,100 lbs. GVWR @ 15% Tongue Weight
• CPTL16:	16,100 lbs. GVWR @ 15% Tongue Weight
• CPTL16:	16,100 lbs. GVWR @ 15% Tongue Weight
• CPT22:	22,100 lbs. GVWR @ 15% Tongue Weight
• CPTL22:	22,100 lbs. GVWR @ 15% Tongue Weight
• CPTL22:	22,100 lbs. GVWR @ 15% Tongue Weight

AXLES

• CPT16:	Tandem 7K lbs. Torsion
• CPTL16:	Tandem 7K lbs. Torsion
• CPTL16:	Tandem 7K lbs. Torsion
• CPT22:	Tandem 10K lbs. Sprung
• CPTL22:	Tandem 10K lbs. Sprung
• CPTL22:	Tandem 10K lbs. Sprung

WHEELS (per axle)

• CPT16:	(4) 16 x 6K / 8 on 6.5 BC w/ Zeroset
• CPTL16:	(4) 16 x 6K / 8 on 6.5 BC w/ Zeroset
• CPTL16:	(4) 16 x 6K / 8 on 6.5 BC w/ Zeroset
• CPT22:	(4) 17.50 x 6.75 HC / 8 on 6.5 BC w/ 0.19 Inset
• CPTL22:	(4) 17.50 x 6.75 HC / 8 on 6.5 BC w/ 0.19 Inset
• CPTL22:	(4) 17.50 x 6.75 HC / 8 on 6.5 BC w/ 0.19 Inset

TIRES (per axle)

• CPT16:	(4) ST-235/85R16 LR-E Tires
• CPTL16:	(4) ST-235/85R16 LR-E Tires
• CPTL16:	(4) ST-235/85R16 LR-E Tires
• CPT22:	(4) ST-215/75R17 LR-H Tires
• CPTL22:	(4) ST-215/75R17 LR-H Tires
• CPTL22:	(4) ST-215/75R17 LR-H Tires

BRAKES (per axle)

• CPT16:	12.00" x 2.00" Electric w/ Safety Breakaway Kit
• CPTL16:	12.00" x 2.00" Electric w/ Safety Breakaway Kit
• CPTL16:	12.00" x 2.00" Electric w/ Safety Breakaway Kit
• CPT22:	12.25" x 3.38" Electric w/ Safety Breakaway Kit
• CPTL22:	12.25" x 3.38" Electric w/ Safety Breakaway Kit
• CPTL22:	12.25" x 3.38" Electric w/ Safety Breakaway Kit

PAYLOAD: ALL FINAL PAYLOADS BASED ON CHOSEN MODEL AND OPTIONS

OVERALL LENGTH Retracted / Extended Lengths:

- CPT16: 21' / 26' / 31'
- CPTL16: 25' / 32' / 39'
- CPTEL16: 29' / 38' / 47'
- CPT22: 21' / 26' / 31'
- CPTL22: 25' / 32' / 39'
- CPTEL22: 29' / 38' / 47'
- **Optional** Additional / Less Extension Increments Available

OVERALL WIDTH: 89.25"

OVERALL WEIGHT: Actual Trailer Weight will Vary with Options & Finishes Chosen.

POLE SEAT HEIGHT: 45"

CARGO BED

- CPT16: 110.75" L X 63.75" W x 15" H (Customizable)
- CPTL16: 110.75" L X 63.75" W x 15" H (Customizable)
- CPTEL16: 110.75" L X 63.75" W x 15" H (Customizable)
- CPT22: 110.75" L X 63.75" W x 15" H (Customizable)
- CPTL22: 110.75" L X 63.75" W x 15" H (Customizable)
- CPTEL22: 110.75" L X 63.75" W x 15" H (Customizable)

STANDARD FEATURES

- **LIFETIME WARRANTY** MEGA-ROLLER EXTEND / RETRACT SYSTEM
(NO WEAR PADS TO REPLACE!)
- **SECURELOCK™** Tongue Lock Roller System
- NO-BIND EZ-SLIDE STANCHIONS
- Oil Bath Hubs (Greaseable Option All)
- Electric Brakes
- Wheel Chock Holders

POLE SECUREMENT

- Pole Rests: 5" H Beam (Level Lock Stanchions Optional)
- Front Pole Rests: 5" H Beam (Lever Lock Stanchions Optional)
- Winch Binders, Ratcheting Breaker Bar and Bar Pocket

STANDARD TRAILER BODY

- Heavy Duty 6" X 6" X ¼" Wall Male Extendable Tongue
- Heavy Duty 8" X 8" X ¼" Wall Female Structural Tube
- Heavy Duty 7" X 3" X ¼" Wall Frame
- Oversized Precision Rollers w/ Bronze Bearings

—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

STANDARD TRAILER BODY (cont.)

- 7 Position Adjustable Hitch
- 3/8" X 36" GR70 Yellow Zinc Safety Chains with Hooks
- Removable Male Male Extension Tongue
- Standard Cargo Area
- 12,000 lbs. Static Front Jack w/ Spring Return

FRONT POLE SEAT OPTIONS (Mounted on Male Tongue)

- 48" Wide 5" H-Beam Pole Seat w/ EZ-Slide Stanchions (Standard)
- 60" Wide 5" H-Beam Pole Seat w/ EZ-Slide Stanchions (Optional)
- 96" Wide 5" H-Beam Pole Seat w/ EZ-Slide Stanchions (Optional)

WIRING

- DOT/ICC Approved LED Lights and Conspicuity Reflective Tape
- Internal Cat Track Protects Wiring (and air brakes if applicable)
- Removable Rear Access Door for Cat Track and Wiring
- Sealed Beam, Rubber Mounted Stop, Turn, Tail and Marker Lights
- Plug-and-Play Sealco Wiring Harness
- Breakaway Kit with Absorbed Glass Mat (AGM) Battery

PAINT

- I.M.P.A.C.T Intense Metal pH Acid Cleaning Technology
- Hydrofluoric, Sulfuric, Phosphoric ACID Blend Cleaning Preparation
(Re-used sandblasting material can impregnate metals with oil)
- Seams Caulked
- Rust Preventative 2-Part Epoxy Primer
- Standard Colors: Red, Black, White and CAT Yellow

OPTIONS

- 10-Year Galvanized Structural Warranty (2-Year Painted)
- 10K-HD / 15K / 20K Axles Available w/ Air Brakes
- Anti-Lock Brakes (ABS)
- 3" Lunette Eye
- Lever Lock Stanchions
- Wiring Connections Soldered and Sealed w/ Heat Shrink Tubing
- Jack Handle Extension for Full Width (96") Pole Seat
- Wheel Chocks: Rubber or All Weather Galvanized Grip Strut
- Spare Tire and Mount
- 6D-Rings Front, Center and Rear for Cargo / Transformers
- Front Removable / Adjustable Pole Seat Mounted on Front Male Tongue
(Not Recommended)


OPTIONS (cont.)

- Extension Configurations: Customizable (additional / less increments available)
- Solar Charged Breakaway Kit
- Full Size-Opening Toolbox Package
- Full Top-Opening Toolbox Package
- Quick-Rotate Swivel Jack
- Removable Reel Stands / Power Winder / Tension Brake (Sold Separately) (manually liftable) w/ Centering Collars and Lifting Lugs
- 3,300 or 3,900 ft/lbs Hydraulic Power Winder (Shown with Capstan & Adapter) (Comes Standard w/ 2-7/16" Universal Adapter for Capstan and Power Reel Attachments)
- 7 Inch General Purpose Capstan
- Collapsible Power Reel
- Auxiliary Hydraulic Quick-Connect Ports
- 16" Bronze Alloy Ventilated Reel Brake
- 20" Bronze Alloy Ventilated Reel Brake
- 16" Hitch Extension
- 13 HP Honda Engine Hydraulic Power Unit
- Engine Cover
- All Stainless Steel Fasteners (1/2" and under)
- Anti-Skid/Anti-Glare Sand Paint on all Walking Surface
- Truck / Trailer Electric Wiring Socket: Customer Choice

OPTIONAL LIGHT BAR

- All TIG Welded Aluminum
- Contains (4) Four 4" Stop/Turn / Tail Rubber Mounted Sealed Beam LED Lights
- (3) Three Center ID Marker Lights
- (2) Two Side Marker Lights
- 4-Way Die Cast Connector
- 35' Standard Electric Cable Length with a 4-Way Connector Plug

8 7 6 5 4 3 2 1

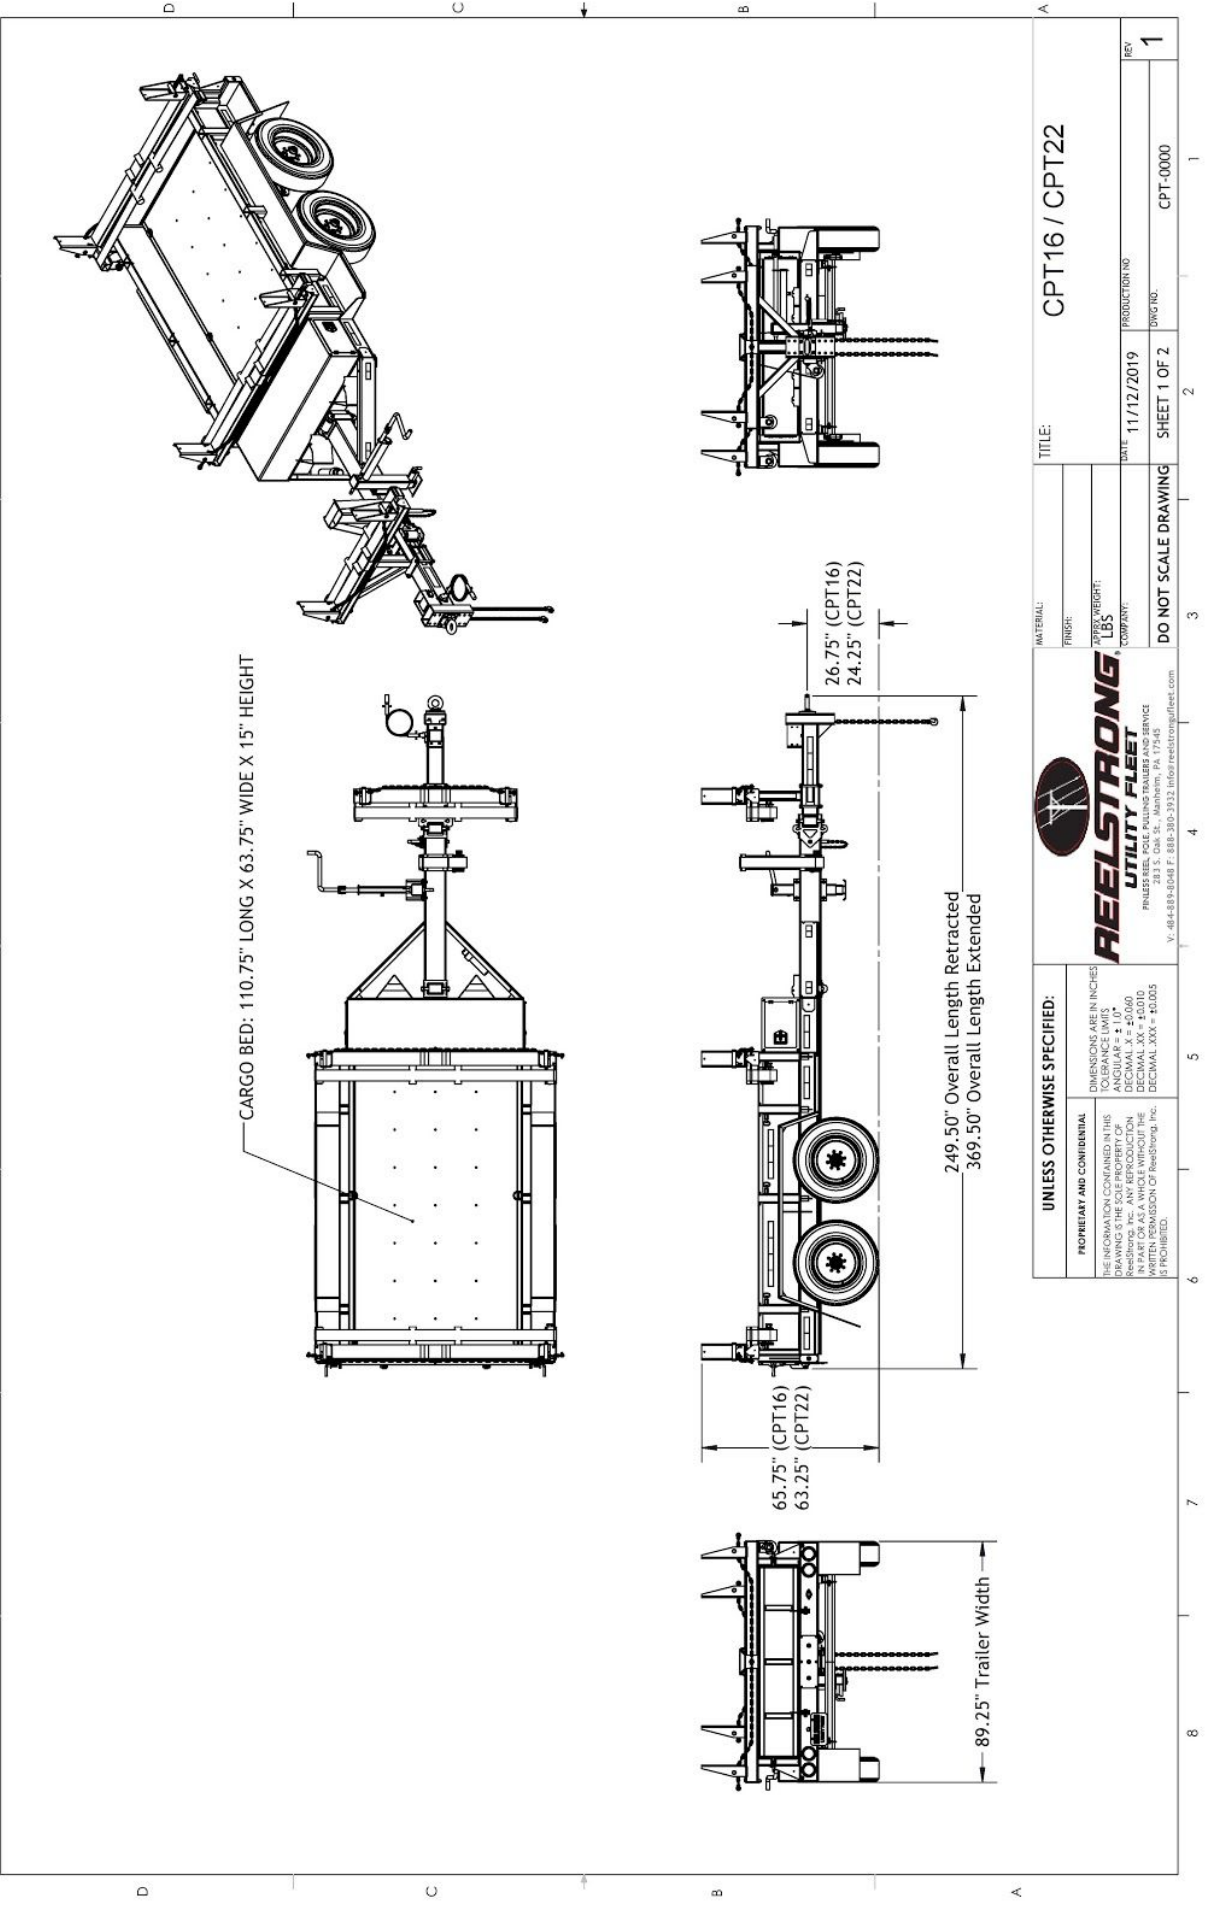

UNLESS OTHERWISE SPECIFIED:		TITLE: CPT16 / CPT22	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF REELSTRONG, INC. ANY REPRODUCTION OR TRANSMISSION OF THIS DRAWING WITHOUT THE WRITTEN PERMISSION OF REELSTRONG, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES	MATERIAL:	
	TOLERANCE LIMITS:	FINISH:	
	ANGULAR = ± 1.0°	WEIGHT:	
	DECIMAL .X = ±0.040	COMPANY:	
		DATE: 11/12/2019	PRODUCTION NO.
		SHEET 1 OF 2	DO NOT SCALE DRAWING
		CPT-0000	REV 1