




MRST-4RC POWERLOCK™ REEL / CARGO TRAILER SPECS

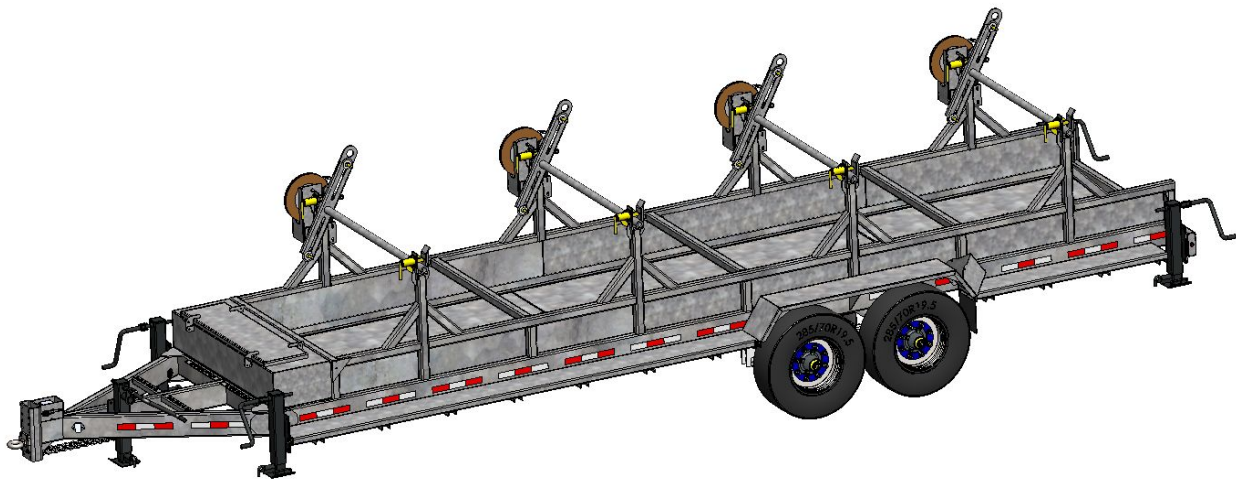

EXCLUSIVE STANDARD ADDED VALUE:

- POWERLOCK™ Technology Provides Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
 - SAFETY and Peace of Mind
 - No Pins, Cotters, or Lanyards that Secure the Reel Arbor (which is the most critical safety point).
 - Faster Reel Loading, Unloading, and Deployment Reduces Labor Costs and Fatigue on Workers.

BUILT FOR SAFETY. BUILT FOR SPEED. BUILT TO LAST.

CAPACITY: 33,950 lbs. GVWR @ 15% Tongue Weight

AXLES: Tandem 15K lbs. Sprung

WHEELS: (4) 19.5 x 8.25 / 8 on 275mm BC w/ 0.63 Outset

TIRES: (4) 285/70R19.5 LR-J Tires

BRAKES: 12.25" x 5.00" Electric w/ Safety Breakaway Kit

PAYLOAD: ALL FINAL PAYLOADS BASED ON CHOSEN MODEL AND OPTIONS

REEL / CARGO WEIGHT (PAYLOAD): 24,000 lbs. Approx. (combined)

REEL DIAMETER: (4) 76" Maximum

REEL WIDTH: 60" Maximum

REEL SHAFT DIAMETER: 2.50" Tube w/ Centering Collars

OVERALL LENGTH: 406" Approx.

OVERALL WIDTH: 101.50"

OVERALL WEIGHT: 8,450 lbs. Approx. (Actual Trailer Weight will Vary with Options & Finishes Chosen)

STANDARD FEATURES

- POWERLOCK™ Technology Provides Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
- Oil Bath Hubs (Greaseable Option All)
- Electric Brakes
- Wheel Chock Holders

STANDARD TRAILER BODY

- Heavy Duty 8" X 3" X ¼" Frame
- 6-Position Adjustable Hitch
- 1/2" X 42" GR70 Yellow Zinc Safety Chains with Hooks
- 12,000 lbs. Static Front Jack w/ Spring Return
- Ground Lug: Copper Alloy Bolted to Frame
- Fenders: ⅛" Tread Plate
- Cargo Area: Approx. 65.25" Wide x 300" Long
- Bed Sides: Approx. 16.94" Tall

—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

WIRING

- DOT / ICC Approved LED Lights and Conspicuity Reflective Tape
- FMVSS / CMVSS Standard 108 LED Lighting
- Sealed Beam, Rubber Mounted Stop, Turn, Tail and Marker Lights
- 100% Sealed Heat-Shrunked Wiring Connections w/ Full Loom
- Breakaway Kit with Absorbed Glass Mat (AGM) Battery

PAINT


- I.M.P.A.C.T Intense Metal pH Acid Cleaning Technology
- Hydrofluoric, Sulfuric, Phosphoric ACID Blend Cleaning Preparation (Re-used sandblasting material can impregnate metals with oil)
- Seams Caulked
- Rust Preventative 2-Part Epoxy Primer
- Standard Colors: Red, Black, White and CAT Yellow

OPTIONS

- 13 HP HONDA Engine Hydraulic Power Pack Comes STANDARD w/ ENGINE COVER, 15 Gallon Reservoir, Replaceable Oil Filter, Pressure Gauge and Solar Fade Resistant Plastic Control Placard. (Electric Start Optional)
- Ten (10) Year Galvanized Structural Warranty (2-Year Painted)
- Aluminum Engine Cover
- 3,300 ft/lbs Torque Hydraulic Take-up Retriever. (Motor Spooled w/ Reel Brake ILO Cross-Over Relief Valve for Smooth Instant Reel Stoppage)
- Hydraulic Hose Rotary Swivel Union (*manages & eliminates loose hydraulic hoses*)
- 2-7/16" Universal Adapter for Capstan and Power Reel Attachments
- 7 Inch General Purpose Capstan
- Collapsible Power Reel
- Rotating Arbor Ground
- Auxiliary Hydraulic Quick-Connect Ports
- 16" Bronze Alloy Ventilated Reel Brake
- 9" Stainless Steel Overspin Brake
- 16" Long 6-Bolt Hitch Extension (w/ 52" Safety Chains and Breakaway Cable Extension)
- 3" Lunette Eye
- All Stainless Steel Fasteners (1/2" and under)
- Anti-Skid/Anti-Glare Sand Paint on all Walking Surfaces
- Various Trailer Light Plugs (Customer Choice)
- Aluminum or Steel Toolbox
- Air Brakes w/ ABS
- Wiring Connections Soldered and Sealed w/ Heat Shrink Tubing
- Plug-and-Play Sealco Wiring Harness
- Wheel Chocks: Rubber or All Weather Galvanized Grip Strut
- Spare Tire and Mount

OPTIONS (cont.)

- Solar Charged Breakaway Kit
- Strobe Warning Lights
- Hydraulic Front Jack
- Truck-Lite Lighting
- Lug Nut Indicators

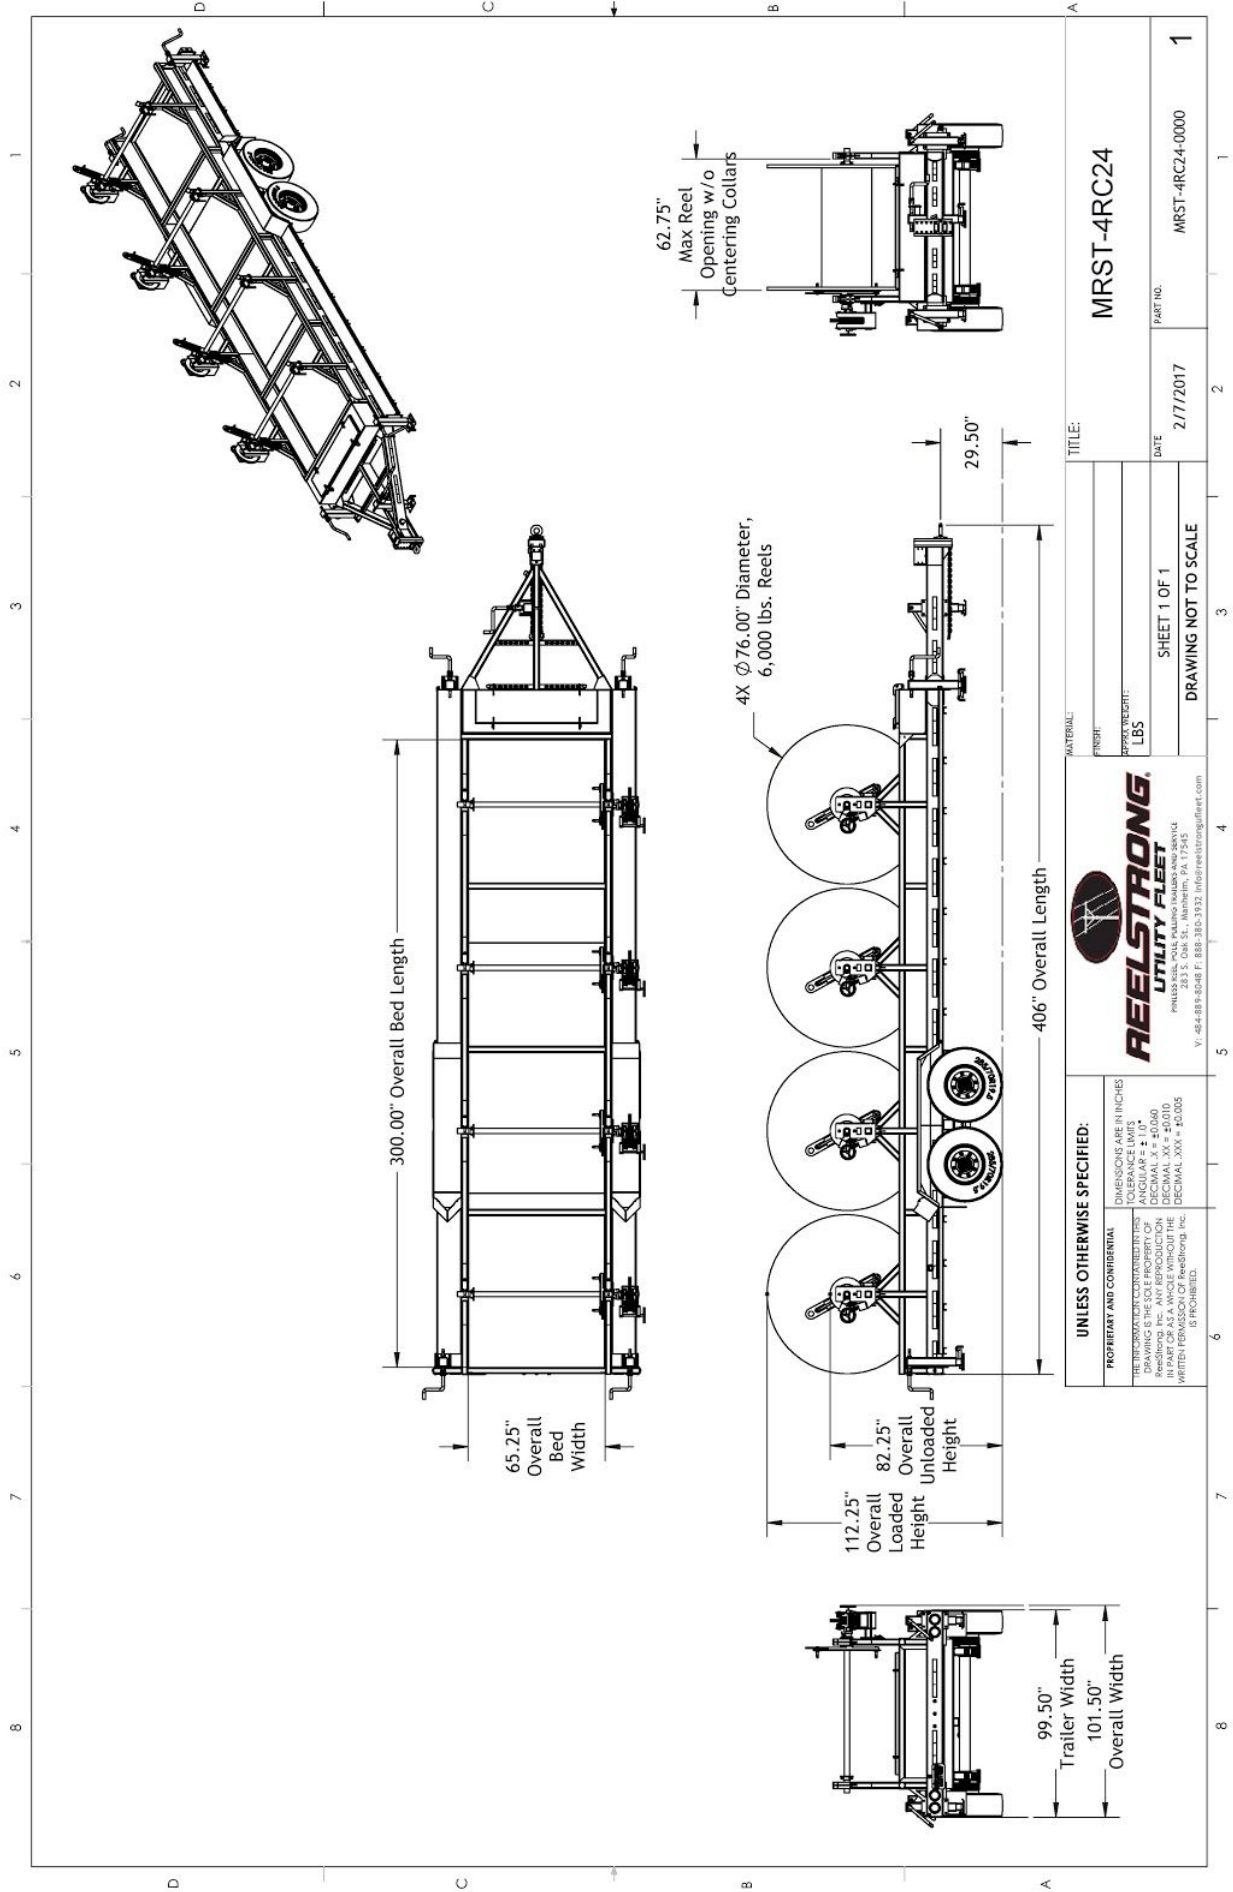

TITLE: MRST-4RC24		PART NO. MRST-4RC24-0000	
SHEET 1 OF 1		DATE 2/7/2017	
DRAWING NOT TO SCALE		1	

UNLESS OTHERWISE SPECIFIED:		DIMENSIONS ARE IN INCHES	
TOLERANCE LIMITS		TOLERANCE LIMITS	
FRACTIONS		FRACTIONS	
DECIMAL .XX		DECIMAL .XX	
DECIMAL .XXX		DECIMAL .XXX	
DECIMAL .XXXX		DECIMAL .XXXX	
IS PROHIBITED		IS PROHIBITED	



REELSTRONG
UTILITY FLEET

PHILADELPHIA, PA 19104
Y: 484-889-6248 F: 888-380-3932 info@reelstrongfleet.com