



CP-SL COIL PIPE SELF-LOADING TRAILER SPECS



EXCLUSIVE STANDARD ADDED VALUE:

- Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
- Self-Loading Feature to Easily Load Coil / Pipe
- Floating Spindle Turret Allows for Adjustability from 30" ID to 68" ID (90" OD Max.)
- Turntable Holds Coils with a Height up to 50"
- Turret Brake Easily Engages by Pulling a Hand Lever
- (2) Removable Outside Diameter Posts
- Low Center of Gravity

BUILT FOR SAFETY. BUILT FOR SPEED. BUILT TO LAST.

CAPACITIES

- CP-SL3.4: 5,980 lbs. GVWR

AXLES

- CP-SL3.4: 5.2K lbs. Torsion

WHEELS

- CP-SL3.4: (2) 16 x 6K / 6 on 5.5 BC w/ Zeroset

TIRES

- CP-SL3.4: (2) LT235/85R16 LR-E Tires

BRAKES

- CP-SL3.4: 12.00" x 2.00" Electric w/ Safety Breakaway Kit

PAYLOAD: ALL FINAL PAYLOADS BASED ON CHOSEN MODEL AND OPTIONS

COIL WEIGHT (PAYLOAD)

- CP-SL3.4: 3,400 lbs. Approx.

COIL HEIGHT (from turntable): 50"

COIL DIAMETER: 30" to 68" ID Adjustability (90" OD Max)

OVERALL LENGTH: 162.50" Approx.

OVERALL WIDTH: 96" Approx.

OVERALL WEIGHT: Actual Trailer Weight will Vary with Options & Finishes Chosen.

STANDARD FEATURES

- Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
- Oil Bath Hubs (Greaseable Option All)
- Electric Brakes
- Wheel Chock Holders
- (2) Removable 2" x 2" Vertical Outside Diameter Posts
- Floating Spindle Turret Allows for Adjustability from 30" ID to 68" ID (90" OD Max)
- Turntable Holds Coils with a Height up to 50"
- Brake Easily Engages by Pulling a Hand Lever
- Self-Loading Feature to Easily Load Coil / Pipe
- EZ Pump Enerpac Vertical Hand Pump (Self-Loading)
- Heavy Duty 6.00" x 4.00" x ¼" Tube Frame

STANDARD TRAILER BODY

- 6-Position Adjustable Hitch
- 3/8" X 36" GR70 Yellow Zinc Safety Chains with Hooks
- 8,000 lbs. Static Front Jack
- (2) 8,000 lbs. Static Rear Stabilizer Jacks
- Fenders: 1/8" Plate
- Turntable Cage

WIRING


- DOT / ICC Approved LED Lights and Conspicuity Reflective Tape
- FMVSS / CMVSS Standard 108 LED Lighting
- Sealed Beam, Rubber Mounted Stop, Turn, Tail and Marker Lights
- 100% Sealed Heat-Shrunked Wiring Connections w/ Full Loom
- Breakaway Kit with Absorbed Glass Mat (AGM) Battery

PAINT

- I.M.P.A.C.T Intense Metal pH Acid Cleaning Technology
- Hydrofluoric, Sulfuric, Phosphoric ACID Blend Cleaning Preparation
(Re-used sandblasting material can impregnate metals with oil)
- Seams Caulked
- Rust Preventative 2-Part Epoxy Primer
- Standard Colors: Red, Black, White and CAT Yellow

OPTIONS

- 10-Year Galvanized Structural Warranty (2-Year Painted)
- Anti-Lock Brakes (ABS)
- Aluminum or Steel Toolbox
- Wiring Connections Soldered and Sealed w/ Heat Shrink Tubing
- Plug-and-Play Sealco Wiring Harness
- Wheel Chocks: Rubber or All Weather Galvanized Grip Strut
- Spare Tire and Mount
- Solar Charged Breakaway Kit
- Strobe Warning Lights
- All Stainless Steel Fasteners (1/2" and under)
- 12-Volt Electric over Hydraulic Power for Self-Loading
- Line Tamer / Pipe Straightener w/ Radial Articulating Arm
- 16" Long 6-Bolt Hitch Extension (w/ 52" Safety Chains and Breakaway Cable Extension)
- 3" Lunette Eye
- Truck / Trailer Electric Wiring Socket: Customer Choice
- Tracer Wire Holder
- Truck-Lite Lighting

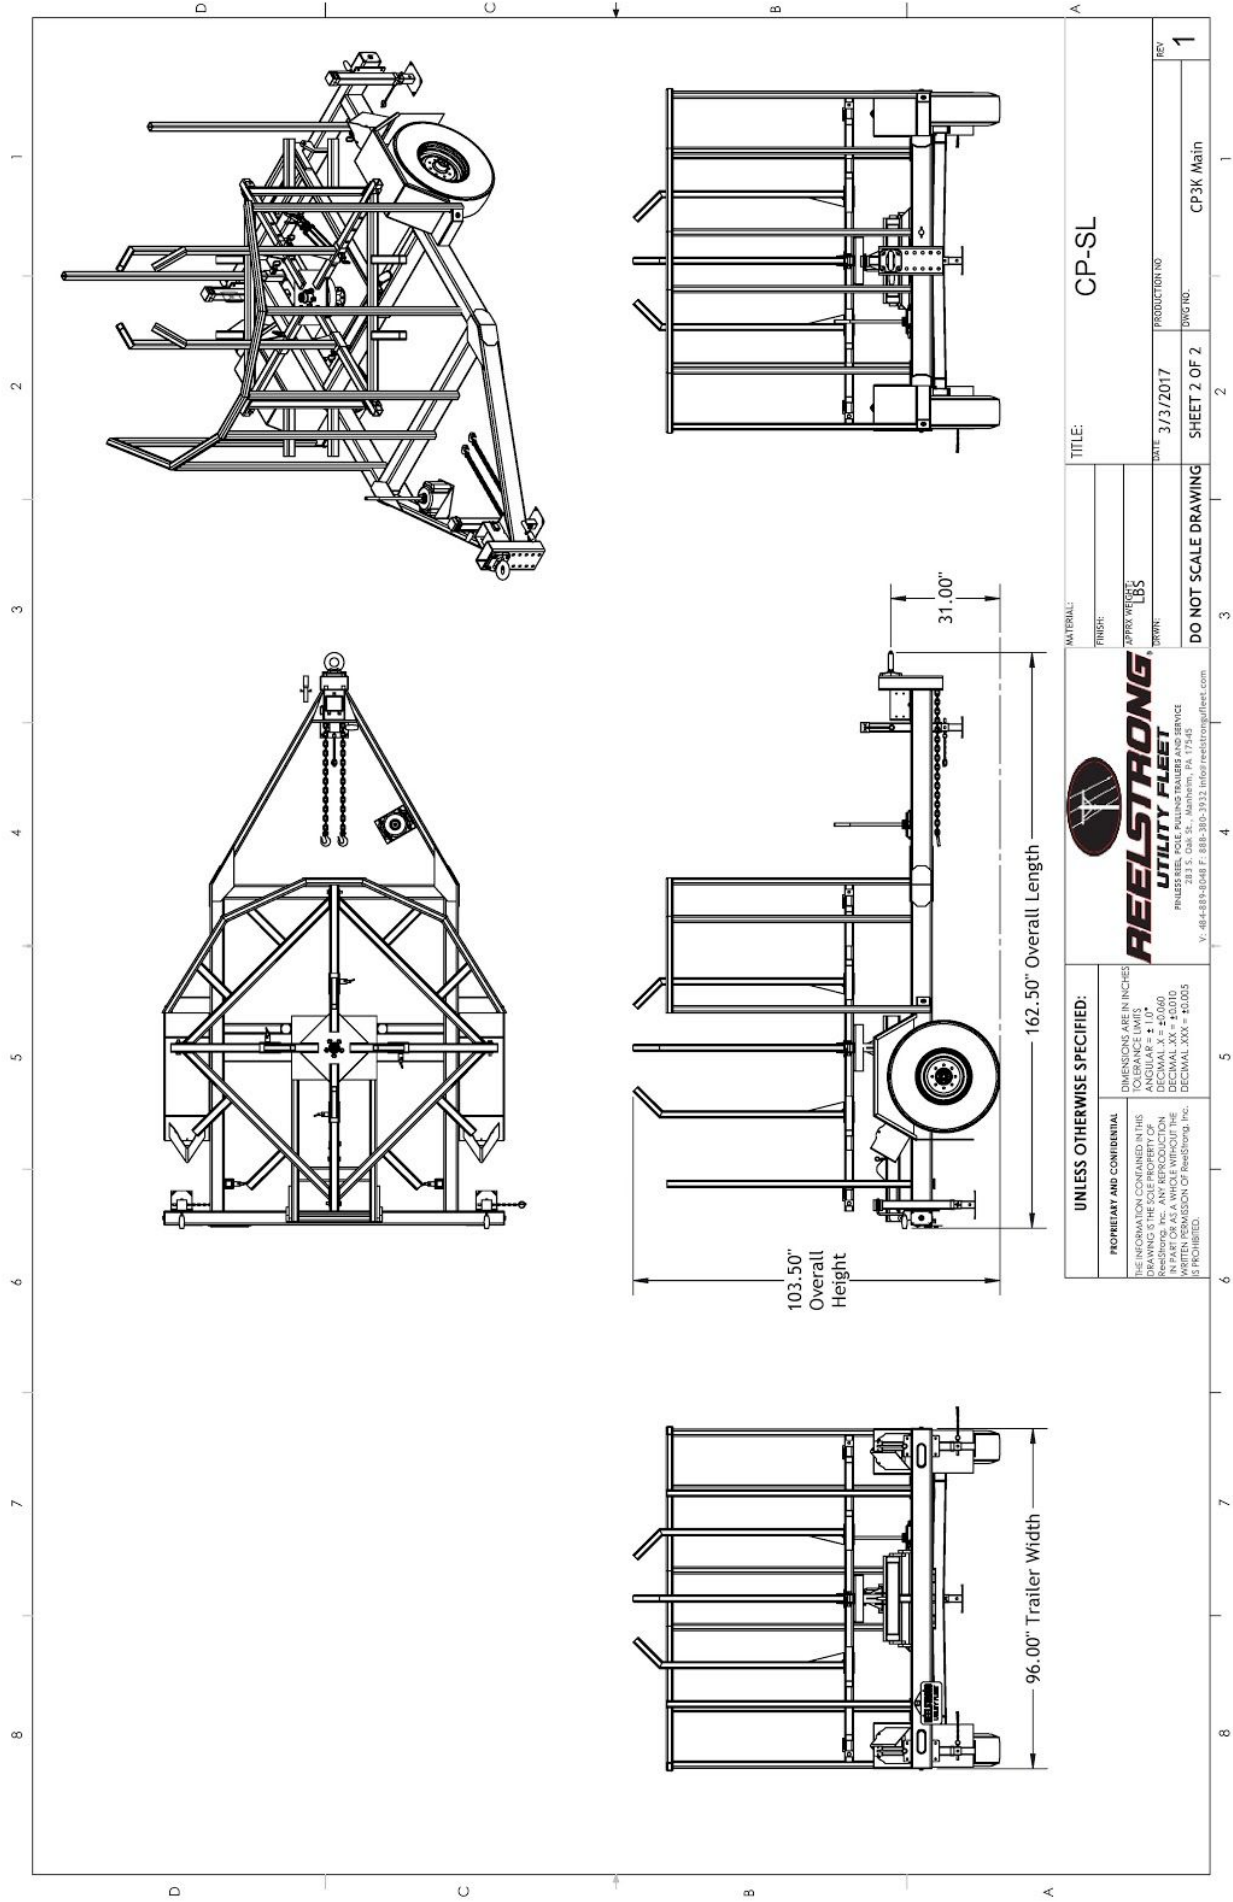

UNLESS OTHERWISE SPECIFIED:				TITLE: CP-SL	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF REELSTRONG, INC. ANY REPRODUCTION OR TRANSMISSION OF THIS DRAWING WITHOUT THE WRITTEN PERMISSION OF REELSTRONG, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCE LIMITS: ANGULAR = ± 1.0° DECIMAL .X = ±0.060 FRACTIONS 1/16" = ±0.015 DECIMAL .XXX = ±0.005				
		PINLESS STEEL POLE, PULLING TRAILERS AND SERVICE			
		V: 404-889-8048 F: 889-390-3932 info@reelstrong.com			
		MATERIAL:			
		FINISH:			
		APPROX WEIGHT LBS			
		DRAWN:			
DO NOT SCALE DRAWING		DATE: 3/3/2017	PRODUCTION NO.	REV	
		SHEET 2 OF 2	DWG NO.	1	
		CP3K Main			