



SP-ST STICK / PIPE TRAILER SPECS



EXCLUSIVE STANDARD ADDED VALUE:

- Industry Leading Safety, Ease of Use, Low Maintenance and Durability
- No-Bind EZ Slide Stanchions
- Low Center of Gravity
- UHMW Composite Bunk Pads w/ Countersunk Fasteners
- Front Bulkhead to Easily Load and Place Material
- Heavy Duty Winch Straps
- Great Price

BUILT FOR SAFETY. BUILT FOR SPEED. BUILT TO LAST.

CAPACITIES

- SP-ST14: 16,100 lbs. GVWR @ 15% Tongue Weight
- SP-ST20: 22,100 lbs. GVWR @ 15% Tongue Weight

AXLES

- SP-ST14: Tandem 7K lbs. Torsion
- SP-ST20: Tandem 10K lbs. Sprung

WHEELS

- SP-ST14: (4) 16 x 6K / 8 on 6.5 BC w/ Zeroset
- SP-ST20: (4) 17.50 x 6.75 HC / 8 on 6.5 BC w/ 0.19 Inset

TIRES

- SP-ST14: (4) ST-235/85R16 LR-E Tires
- SP-ST20: (4) ST-215/75R17 LR-H Tires

BRAKES

- SP-ST14: 12.00" x 2.00" Electric w/ Safety Breakaway Kit
- SP-ST20: 12.25" x 3.38" Electric w/ Safety Breakaway Kit

PAYLOAD: ALL FINAL PAYLOADS BASED ON CHOSEN MODEL AND OPTIONS

OVERALL LENGTH: 558"

OVERALL WIDTH: 96"

OVERALL WEIGHT: Actual Trailer Weight will Vary with Options & Finishes Chosen.

POLE SEAT HEIGHT: 34"

STANDARD FEATURES

- No-Bind EZ Slide Stanchions
- Oil Bath Hubs (Greaseable Option All)
- Electric Brakes
- Wheel Chock Holders
- Heavy Duty Winch Straps
- Front Bulkhead to Easily Load and Place Material
- Low Center of Gravity

POLE SECUREMENT

- Pole Rests: 5" H Beam w/ UHMW Composite Pads
- Winch Binders, Ratcheting Breaker Bar and Bar Pocket

STANDARD TRAILER BODY

- Heavy Duty 12" Channel Frame
- Heavy Duty 6" Channel Crossmembers
- 7-Position Adjustable Hitch
- $\frac{3}{8}$ " X 36" GR70 Yellow Zinc Safety Chains with Hooks
- 12,000 lbs. Static Front Jack w/ Spring Return

WIRING


- DOT / ICC Approved LED Lights and Conspicuity Reflective Tape
- Internal Cat Track Protects Wiring (and air brakes if applicable)
- Removable Rear Access Door for Cat Track and Wiring
- Sealed Beam, Rubber Mounted Stop, Turn, Tail and Marker Lights
- 100% Sealed Heat-Shrunked Wiring Connections w/ Full Loom
- Breakaway Kit with Absorbed Glass Mat (AGM) Battery

PAINT

- I.M.P.A.C.T Intense Metal pH Acid Cleaning Technology
- Hydrofluoric, Sulfuric, Phosphoric ACID Blend Cleaning Preparation
(Re-used sandblasting material can impregnate metals with oil)
- Seams Caulked
- Rust Preventative 2-Part Epoxy Primer
- Standard Colors: Red, Black, White and CAT Yellow

OPTIONS

- 10-Year Galvanized Structural Warranty (2-Year Painted)
- 10K-HD / 15K / 20K Axles Available w/ Air Brakes
- Anti-Lock Brakes (ABS)
- 16" Long 6-Bolt Hitch Extension (w/ 52" Safety Chains and Breakaway Cable Extension)
- 3" Lunette Eye
- Wiring Connections Soldered and Sealed w/ Heat Shrink Tubing
- Plug-and-Play Sealco Wiring Harness
- Wheel Chocks: Rubber or All Weather Galvanized Grip Strut
- Spare Tire and Mount
- Solar Charged Breakaway Kit
- Truck-Lite Lighting
- Rear Extending Gas Pipe Trailer using SECURELOCK™ Technology (SP-RE)
 - Bed Length Extends from 33' Retracted to 40' Extended
 - Overall Length: 45.3' (Extended)
 - Overall Width: 96" & 102" Available
 - Same Capacities are Available

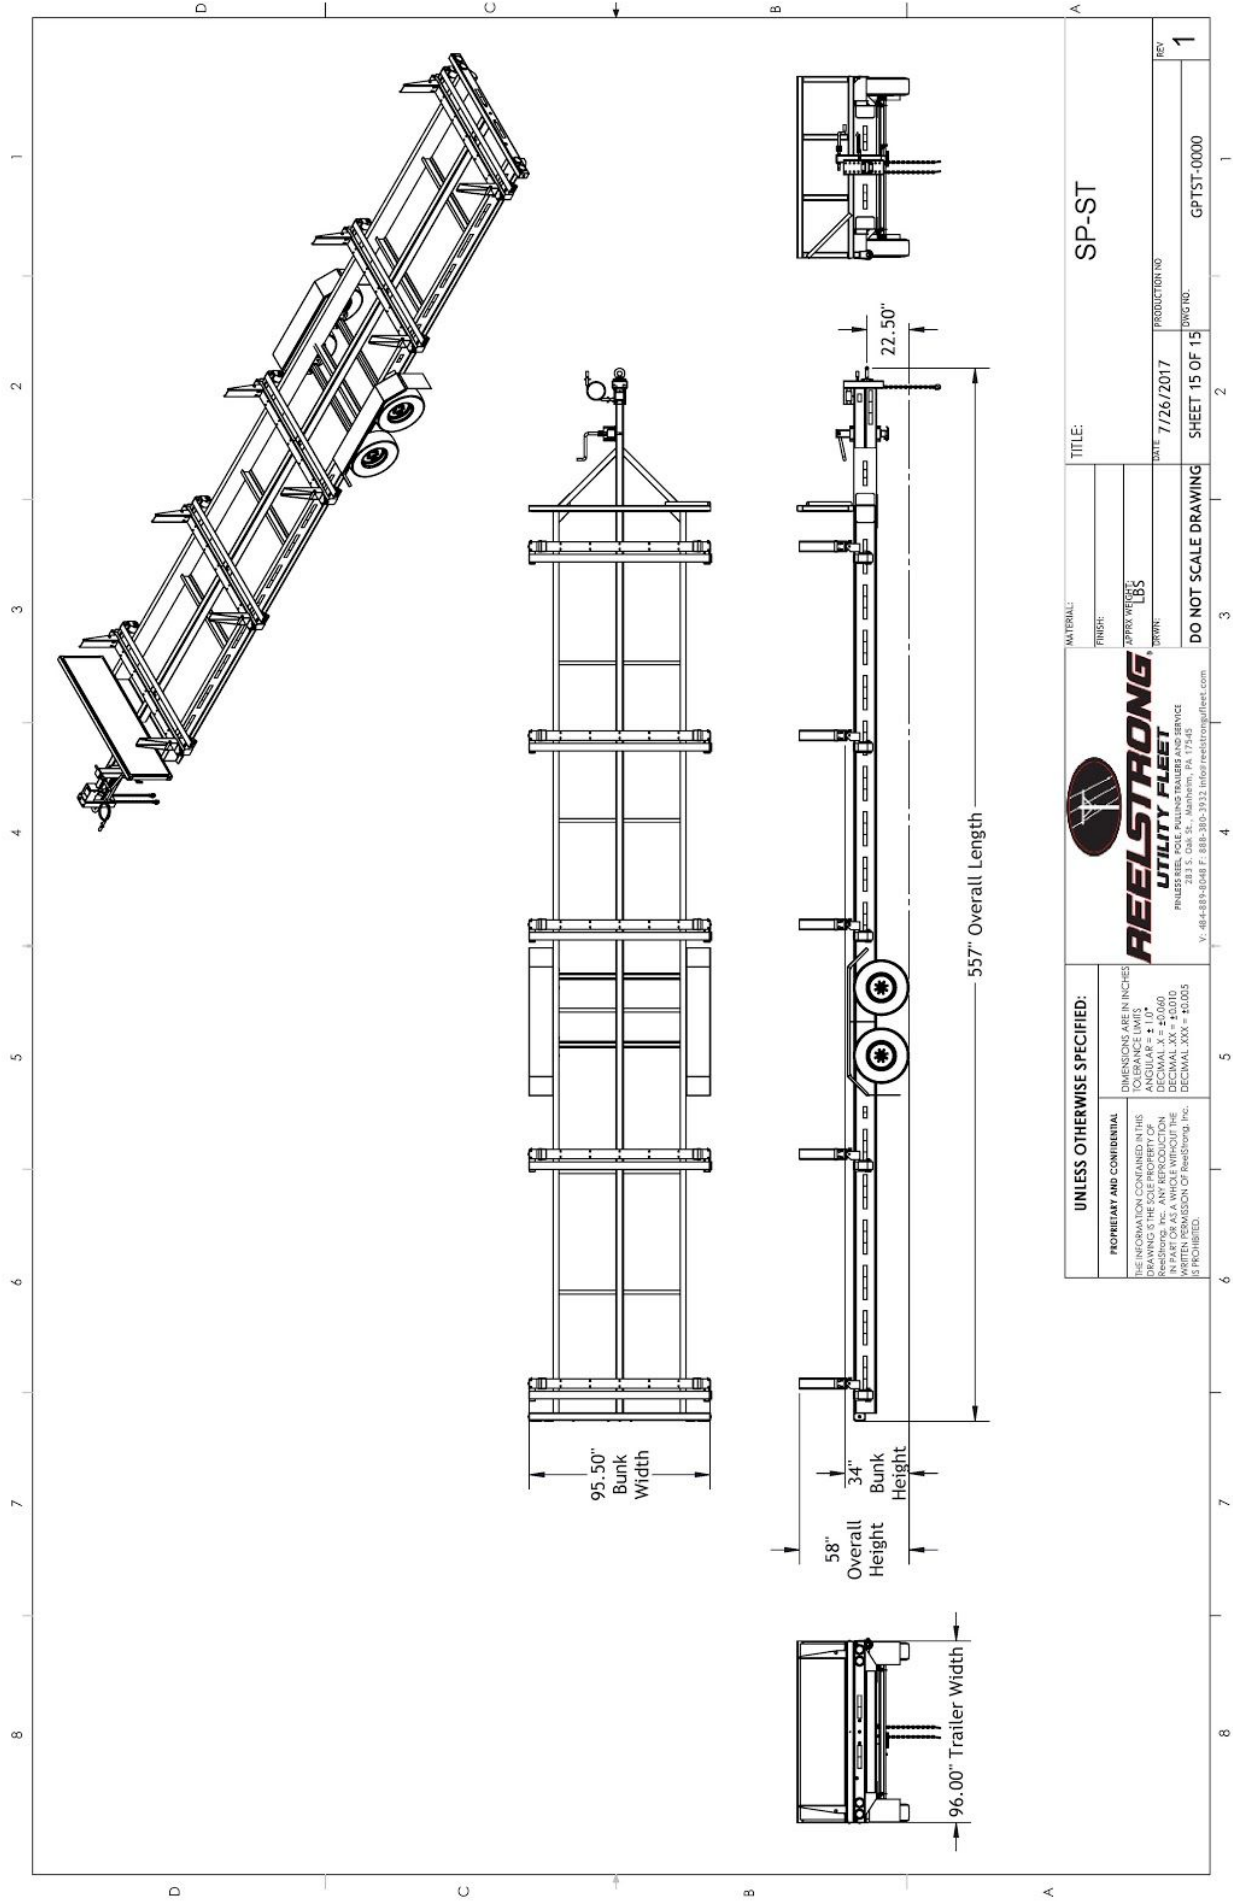

UNLESS OTHERWISE SPECIFIED:		DIMENSIONS ARE IN INCHES	
PROPRIETARY AND CONFIDENTIAL		TOLERANCE LIMITS:	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF REELSTRONG, INC. ANY REPRODUCTION OR TRANSMISSION OF THIS DRAWING WITHOUT THE WRITTEN PERMISSION OF REELSTRONG, INC. IS PROHIBITED.		ANGULAR = ± 1.0°	
		DECIMAL .XX = ±0.040	
		DECIMAL .XXX = ±0.005	

REELSTRONG[®]
UTILITY FLEET

FRAMES REEL POLE PULPING TRAILERS AND SERVICE
1000 W. MARKET ST. SUITE 100
PA 17345
V. 484-889-6248 F. 888-393-3932 info@reelstrongutilityfleet.com

MATERIAL:		TITLE:	
FINISH:		SP-ST	
APPROX WEIGHT: 185 LBS			
DATE: 7/26/2017		PRODUCTION NO:	
DRAWING NO:		SHEET 15 OF 15	
DO NOT SCALE DRAWING		GPTST-0000	
		REV: 1	