



PL12 POWERLOCK™ STRINGING REEL TRAILER SPECS



EXCLUSIVE STANDARD ADDED VALUE:

- POWERLOCK™ Technology Provides Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
 - SAFETY and Peace of Mind
 - No Pins, Cotters, or Lanyards that Secure the Reel Arbor (which is the most critical safety point).
 - Faster Reel Loading, Unloading, and Deployment Reduces Labor Costs and Fatigue on Workers.

BUILT FOR SAFETY. BUILT FOR SPEED. BUILT TO LAST.

CAPACITIES

- PL12: 22,100 lbs. GVWR @ 15% Tongue Weight
- PL12-C: 22,100 lbs. GVWR @ 15% Tongue Weight

AXLES

- PL12: Tandem 10K lbs. Sprung
- PL12-C: Tandem 10K lbs. Sprung

WHEELS

- PL12: (4) 17.5 x 6.75 HC / 8 on 6.5 BC w/ 0.19 Inset
- PL12-C: (4) 17.5 x 6.75 HC / 8 on 6.5 BC w/ 0.19 Inset

TIRES

- PL12: (4) ST-215/75R17.5 LR-H Tires
- PL12-C: (4) ST-215/75R17.5 LR-H Tires

BRAKES

- PL12: 12.25" x 3.38" Electric w/ Safety Breakaway Kit
- PL12-C: 12.25" x 3.38" Electric w/ Safety Breakaway Kit

PAYLOAD: ALL FINAL PAYLOADS BASED ON CHOSEN MODEL AND OPTIONS

REEL WEIGHT (PAYLOAD)

- PL12: 12,000 lbs. Approx.
- PL12-C: 12,000 lbs. Approx.

REEL DIAMETER: 108" Maximum

REEL WIDTH: 60" Maximum

REEL SHAFT DIAMETER: 3.00" Tube w/ Heavy Duty Lifting Lug Centering Collar

OVERALL LENGTH: 198.75" Approx.

OVERALL WIDTH: 102"

OVERALL WEIGHT: Actual Trailer Weight will Vary with Options & Finishes Chosen.

STANDARD FEATURES

- POWERLOCK™ Technology Provides Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
- Oil Bath Hubs (Greaseable Option All)

—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

STANDARD FEATURES (cont.)

- Electric Brakes
- Wheel Chock Holders

STANDARD TRAILER BODY

- Heavy Duty 6" X 4" X ¼" Frame
- 6-Position Adjustable Hitch
- ½" X 42" GR70 Yellow Zinc Safety Chains with Hooks
- 12,000 lbs. Static Front Jack w/ Spring Return
- Ground Lug: Copper Alloy Bolted to Frame
- Fenders: ⅛" Tread Plate
- (2) Rear 12,000 lbs. Static Stabilizer Jacks w/ Spring Return

WIRING

- DOT / ICC Approved LED Lights and Conspicuity Reflective Tape
- FMVSS / CMVSS Standard 108 LED Lighting
- Sealed Beam, Rubber Mounted Stop, Turn, Tail and Marker Lights
- 100% Sealed Heat-Shrunked Wiring Connections w/ Full Loom
- Breakaway Kit with Absorbed Glass Mat (AGM) Battery

PAINT

- I.M.P.A.C.T Intense Metal pH Acid Cleaning Technology
- Hydrofluoric, Sulfuric, Phosphoric ACID Blend Cleaning Preparation
(Re-used sandblasting material can impregnate metals with oil)
- Seams Caulked
- Rust Preventative 2-Part Epoxy Primer
- Standard Colors: Red, Black, White and CAT Yellow

OPTIONS

- 13 HP HONDA Engine Hydraulic Power Pack Comes STANDARD w/ ENGINE COVER, 15 Gallon Reservoir, Replaceable Oil Filter, Pressure Gauge and Solar Fade Resistant

Plastic


- Control Placard. (Electric Start Optional)
- 10-Year Galvanized Structural Warranty (2-Year Painted)
- 3,300 ft/lbs Hydraulic Take-up Retriever
- 2-7/16" Universal Adapter for Capstan and Power Reel Attachments
- 7 Inch General Purpose Capstan
- Collapsible Power Reel
- Rotating Arbor Ground
- Auxiliary Hydraulic Quick-Connect Ports
- Rewind Leveler
- 20" Bronze Alloy Ventilated Reel Brake
- 16" Long 6-Bolt Hitch Extension (w/ 52" Safety Chains and Breakaway Cable Extension)

—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

OPTIONS (cont.)

- 3" Lunette Eye
- 10K-HD / 15K / 20K Axles Available w/ Air Brakes
- Anti-Lock Brakes (ABS)
- Aluminum or Steel Toolbox
- Wiring Connections Soldered and Sealed w/ Heat Shrink Tubing
- Plug-and-Play Sealco Wiring Harness
- Wheel Chocks: Rubber or All Weather Galvanized Grip Strut
- Spare Tire and Mount
- Solar Charged Breakaway Kit
- Strobe Warning Lights
- All Stainless Steel Fasteners (½" and under)
- Hydraulic Front Jack
- Truck-Lite Lighting

—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

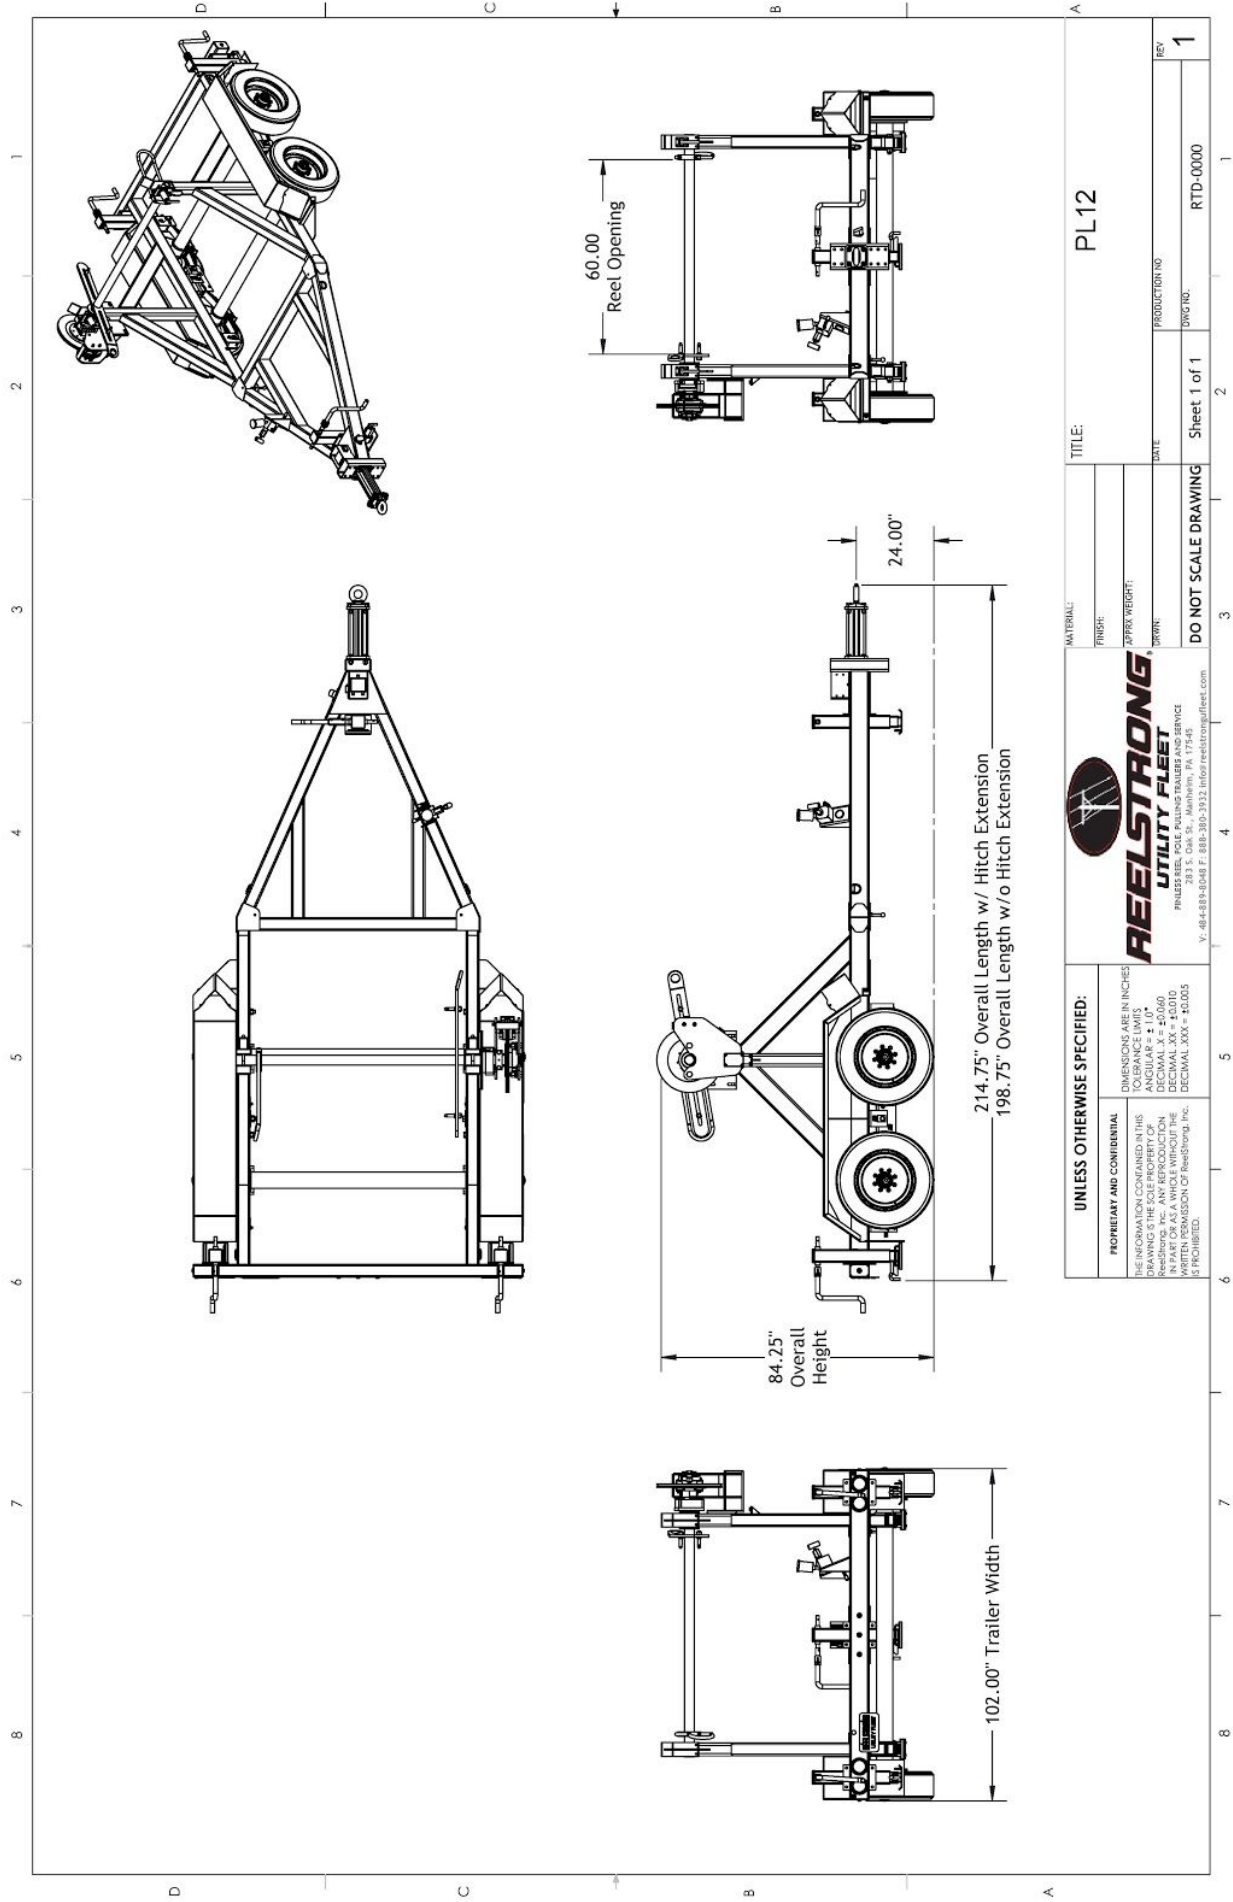

UNLESS OTHERWISE SPECIFIED:		DIMENSIONS ARE IN INCHES	
PROPRIETARY AND CONFIDENTIAL		TOLERANCE LIMITS:	
THE INFORMATION CONTAINED IN THIS		ANGULAR = ± 1.0°	
DRAWING IS THE SOLE PROPERTY OF		DECIMAL X = ± 0.060	
ReelStrong, Inc. ANY REPRODUCTION		FRACTIONAL X = ± 1/32"	
WITHOUT WRITTEN PERMISSION OF ReelStrong, Inc.		DECIMAL XXX = ± 0.005	
IS PROHIBITED.			
		ReelStrong, Inc. 17745 Plymouth, PA 17745 V. 484-889-6048 F. 888-393-3932 Email: info@reelstrong.com	
		REELSTRONG UTILITY FLEET	
		MATERIAL: PL12	
		FINISH:	
		APPROX WEIGHT:	
		DRAWING:	
		DATE:	
		PRODUCTION NO:	
		DRAWING:	
		Sheet 1 of 1	
		RTD-0000	
		1	