




RS10-12 POWERLOCK™ REEL STAND SPECS

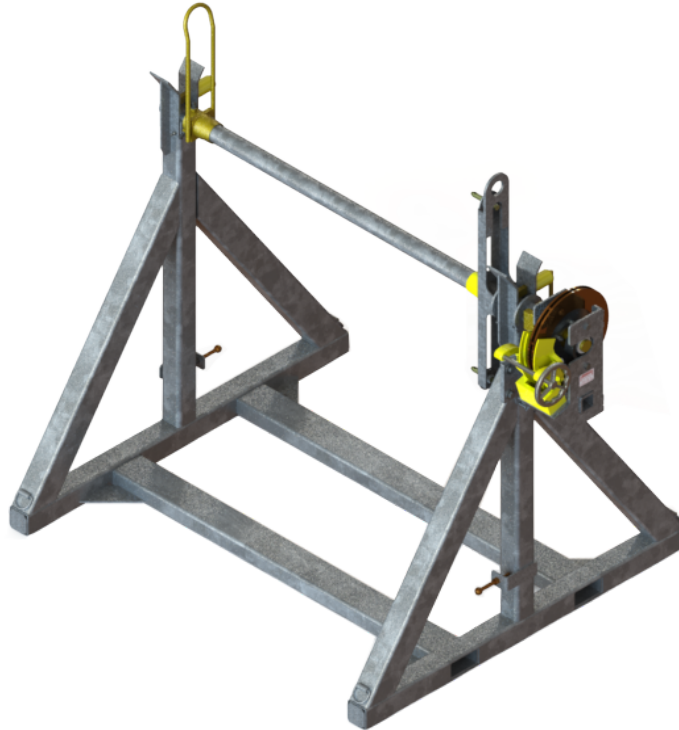

EXCLUSIVE STANDARD ADDED VALUE:

- POWERLOCK™ Technology Provides Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
 - SAFETY and Peace of Mind
 - No Pins, Cotters, or Lanyards that Secure the Reel Arbor (which is the most critical safety point).
 - Faster Reel loading, Unloading, and Deployment Reduces Labor Costs and Fatigue on Workers.
- No Tools Required to Replace Reels

BUILT FOR SAFETY. BUILT FOR SPEED. BUILT TO LAST.

MAX REEL DIAMETER (customizable)

- RS10-12: 108"

MAX REEL WIDTH (customizable)

- RS10-12: 60"

MAX REEL WEIGHT (customizable)

- RS10-12: 10,000-12,000 lbs.

ARBOR BAR

- RS10-12: 3.00" w/ Centering Collar
(Optional Reel Adapters Available for Larger Arbor Holes)

REEL STAND LENGTH

- RS10-12: 68"

REEL STAND WIDTH

- RS10-12: 92.25"

REEL STAND HEIGHT

- RS10-12: 68.75" w/o Reel

STANDARD FEATURES

- POWERLOCK™ Technology Provides Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
- Arbor Assembly Lifts Out of Brake Dog w/o Side-Shifting the Arbor to Disengage
- No Tools Required to Replace Reels
- Ground Lug: Copper Alloy Bolted to Frame

CONSTRUCTION


- Reinforced Truss on Rectangular Base Frame
- Steel Tube Frame Continuously Welded
- D-Rings Located on Each Corner for Tie Down

PAINT

- I.M.P.A.C.T Intense Metal pH Acid Cleaning Technology
- Hydrofluoric, Sulfuric, Phosphoric ACID Blend Cleaning Preparation
(Re-used sandblasting material can impregnate metals with oil)
- Rust Preventative 2-Part Epoxy Primer
- Standard Colors: Red, Black, White and CAT Yellow

OPTIONS

- 13 HP HONDA Engine Hydraulic Power Pack Comes STANDARD w/ ENGINE COVER, 15 Gallon Reservoir, Replaceable Oil Filter, Pressure Gauge and Solar Fade Resistant Plastic Control Placard. (Electric Start Optional)
- 10-Year Galvanized Structural Warranty (2-Year Painted)
- 16" Bronze Alloy Ventilated Reel Brake
- Hydraulic Hand Pump, Accumulator, and Pressure Gauge. Smooth Operation and Consistent Brake Pressure. (Pairs with the 16" Reel Brake)
- 3,300 ft/lbs Hydraulic Take-up Retriever (Shown with Capstan & Adapter)
- 2-7/16" Universal Adapter for Capstan and Power Reel Attachments
- 7 Inch General Purpose Capstan
- Collapsible Power Reel
- Auxiliary Hydraulic Quick-Connect Ports
- Reel Adapters Available for Larger Reel Arbor Holes
- Aluminum or Steel Toolbox
- Wiring Connections Soldered and Sealed w/ Heat Shrink Tubing
- Strobe Warning Lights
- All Stainless Steel Fasteners (1/2" and under)

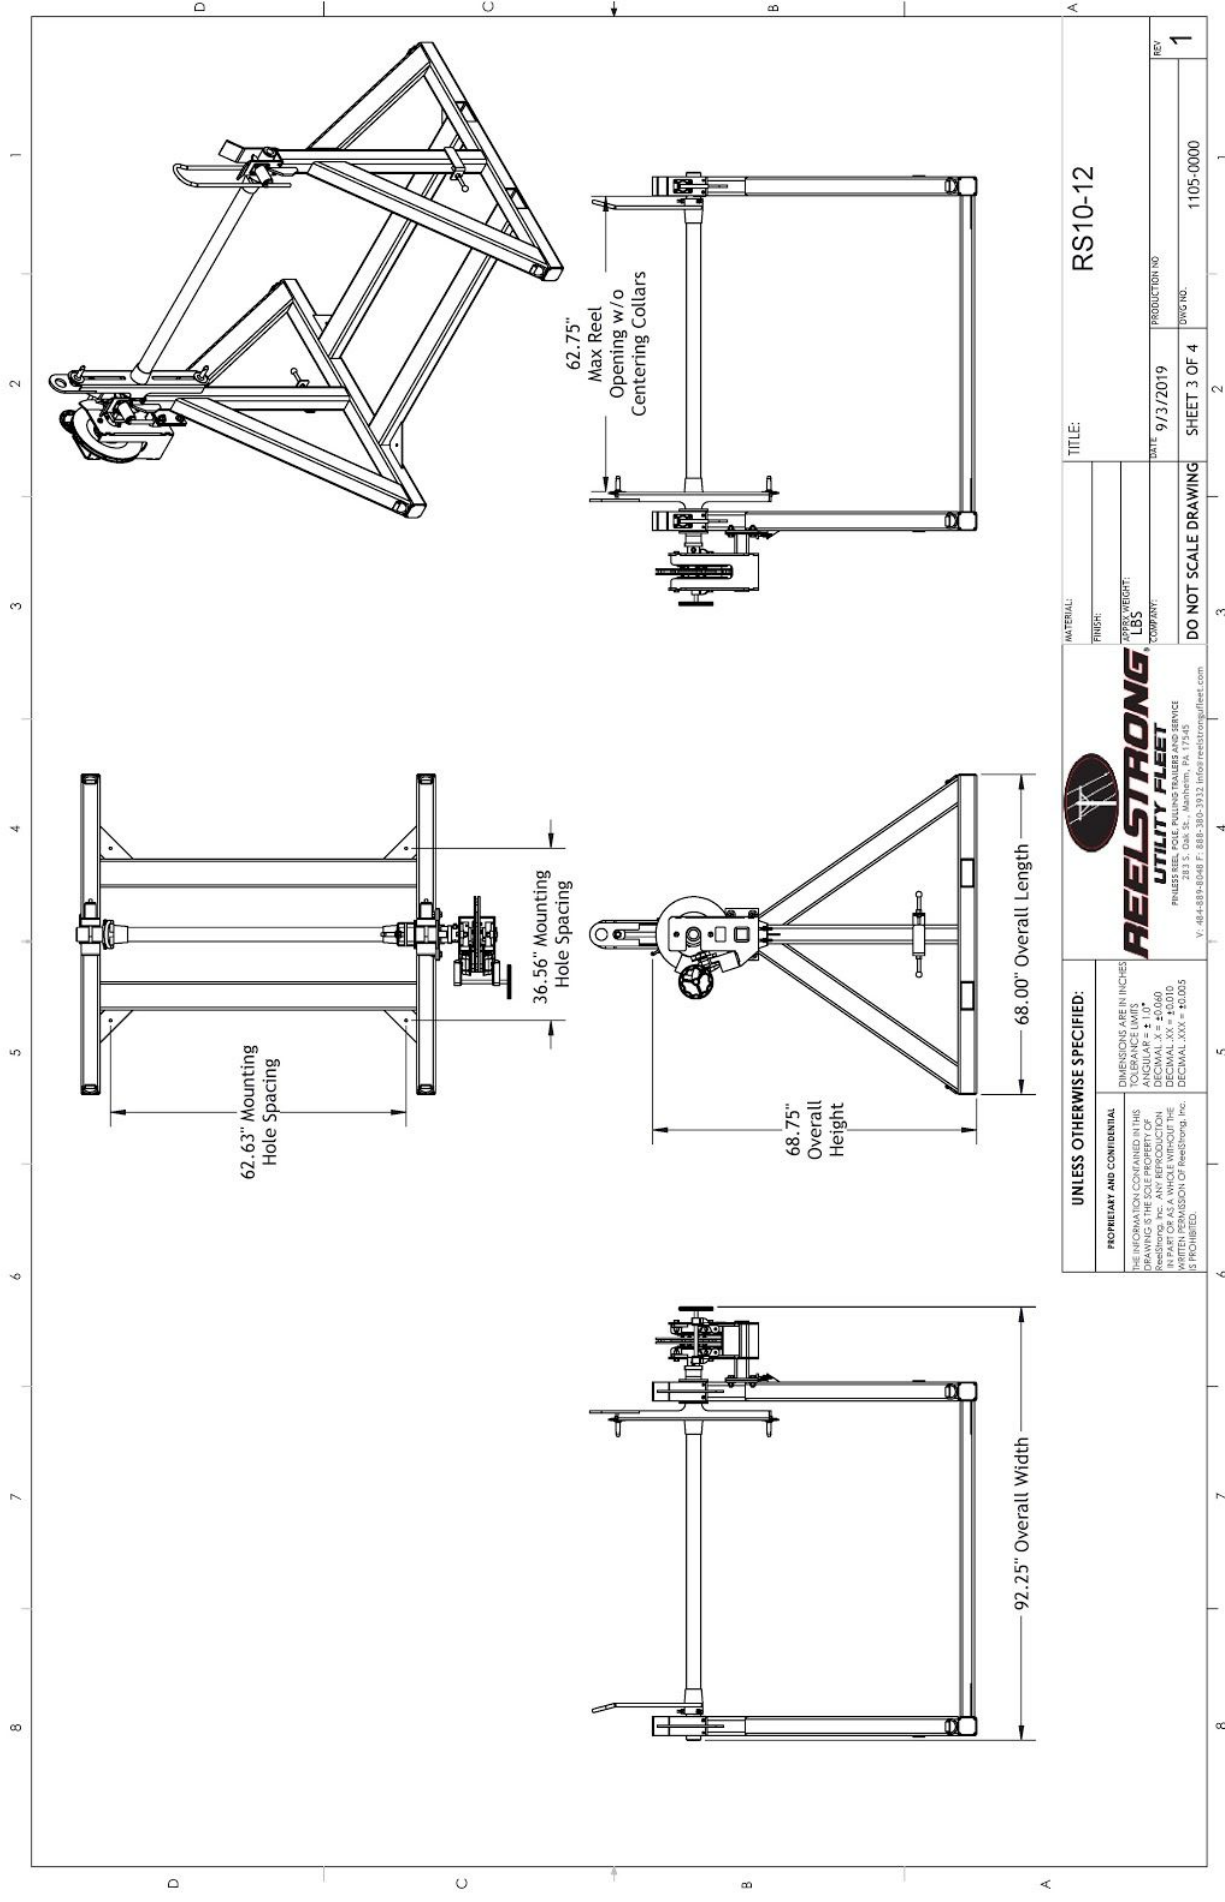

UNLESS OTHERWISE SPECIFIED:		TITLE: RS10-12	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF REELSTRONG UTILITY FLEET, INC. AND IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT THE WRITTEN PERMISSION OF REELSTRONG UTILITY FLEET, INC. IT IS PROHIBITED.	DIMENSIONS ARE IN INCHES		
	TOLERANCE LIMITS		
	ANGULAR ± 1.0°		
	DECIMAL ± 0.010		
	FRACTIONAL ± 1/32"		
		MATERIAL:	DATE: 9/3/2019
		FINISH:	TIME: 3 OF 4
		WEIGHT: LBS	PRODUCT NO: 1105-0000
		COMPANY:	REV: 1
		DO NOT SCALE DRAWING	
		V: 484-889-6048 F: 888-380-3932 info@reelstrongutility.com	