

REELSTRONG[®]

UTILITY FLEET

CLD POWERLOCK™ REEL TRAILER SPECS



LOWEST TOTAL COST OF OWNERSHIP (TCO) From:

- **LIFETIME WARRANTY PINLESS POWERLOCK™** Reel Bar Securement
- No Pins or Cotters to Secure Reel Bar *(most critical safety point)*.
- Fastest, Safest Loading, Unloading and Deployment Reduces Labor .
- Yellow Zinc Electro-Plated and Stainless Precision Machined Components
- **PRACTICAL:** No Expensive, Unnecessary Bronze Components, yet we Don't Cut Corners and Provide Premium, Heavy Duty, Top-Quality Latches, Hardware, Fittings and Components.

BUILT FOR SAFETY. BUILT FOR SPEED. BUILT TO LAST.

CAPACITIES

- CLD8: 11,050 lbs. GVWR @ 15% Tongue Weight
- CLD14: 18,850 lbs. GVWR @ 18% Tongue Weight
- CLD20: 27,600 lbs. GVWR @ 15% Tongue Weight

AXLES

- CLD8: Single 10K lbs. Sprung
- CLD14: Tandem 8K lbs. Torsion
- CLD20: Triple 8K lbs. Torsion

WHEELS

- CLD8: (2) 17.5 x 6.75 HC / 8 on 6.5 BC w/ 0.19 Inset
- CLD14: (4) 17.5 x 6.75 HC / 8 on 6.5 BC w/ 0.19 Inset
- CLD20: (6) 17.5 x 6.75 HC / 8 on 6.5 BC w/ 0.19 Inset

TIRES

- CLD8: (2) 215/75R17.5 LR-H Tires
- CLD14: (4) 215/75R17.5 LR-H Tires
- CLD20: (6) 215/75R17.5 LR-H Tires

BRAKES

- CLD8: 12.25" x 3.38" Electric w/ Safety Breakaway Kit
- CLD14: 12.25" x 3.38" Electric w/ Safety Breakaway Kit
- CLD20: 12.25" x 3.38" Electric w/ Safety Breakaway Kit

PAYLOAD: ALL FINAL PAYLOADS BASED ON CHOSEN MODEL AND OPTIONS

REEL WEIGHT (PAYLOAD)

- CLD8: 8,000 lbs. Approx.
- CLD14: 14,000 lbs. Approx.
- CLD20: 20,000 lbs. Approx.

REEL DIAMETER:

- CLD8: 96"
- CLD14: 96"
- CLD20: 120"

REEL WIDTH: 60" Max

REEL SHAFT DIAMETER:

- CLD8: 2.88"
- CLD14: 3"

REEL SHAFT DIAMETER (cont.):

- CLD20: 3"

OVERALL LENGTH:

- CLD8: 186.25"
- CLD14: 182.50"
- CLD20: 198.25"

OVERALL WIDTH: 102"

OVERALL WEIGHT: Actual Trailer Weight will Vary with Options & Finishes Chosen.

STANDARD FEATURES

- **LIFETIME WARRANTY PINLESS AUTOLOCK™**
- Oil Bath Hubs (Greaseable Option All)
- Electric Brakes
- Wheel Chock Holders
- Dexter Axles
- OPEN TOP, "NON ENCAPSULATED" NYLATRON BEARING SADDLE (low-coefficient of friction). OPEN TOP = LESS FRICTION/LOW MAINTENANCE and EASIER PAY-OUT. (Haven't Replaced a Saddle due to Wear in 13 Years)
- Electric Brakes
- Wheel Chock Holders
- 6D-Rings Front, Center and Rear for Cargo / Transformers

STANDARD TRAILER BODY

- 6" X 3" X ¼" Frame (CLD8/CLD14)
- 8" X 3" X ¼" Frame (CLD20)
- 6-Position Adjustable Hitch
- ¾" X 36" GR70 Yellow Zinc Safety Chains with Hooks
- Standard Cargo Area
- 12,000 lbs. Static Front Jack w/ Spring Return
- Ground Lug: Copper Alloy Star Washer Bolted to Frame (Welded Optional)
- Fenders: ⅛" Fabricated Diamond Plate
- Quick Deploy Outriggers (no loose pins)
- DOT Reflective Conspicuity Tape

LIGHTS/WIRING

- DOT / ICC-- FMVSS / CMVSS Approved LED ULTRA- HIGH VISIBILITY 180 DEGREE BULLET Marker and Clearance Lights
- LED Sealed Beam Rubber Mounted Stop, Turn, Tail and Marker Lights
- 100% Sealed Heat-Shrunked Wiring Connections w/ Full Loom

—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

LIGHTS/WIRING (cont.)

- Breakaway Kit with Absorbed Glass Mat (AGM) Battery
- FULLY PROTECTED 7 or 6 Way Female Plug acts as Junction Box Recessed in FRAME RAIL. No Easily Damaged Plastic Junction Boxes!

PAINT

- Intense Metal pH Acid Surface Prep
(Superior to sandblasting that can infuse metal w/ oil)
- Seams Caulked
- Rust Preventative 2-Part Epoxy Primer
- Two-Part Polyurethane Topcoats (2 topcoats)
- Standard Colors: White and CAT Yellow (Custom Available)

OPTIONS


- 13 HP HONDA Engine Hydraulic Power Pack Comes STANDARD w/ ENGINE COVER, 15 Gallon Reservoir, Replaceable Oil Filter, Pressure Gauge and Solar Fade Resistant Plastic Control Placard. (Electric Start Optional)
- Ten (10) Year Galvanized Structural Warranty (2-Year Painted)
- Aluminum Engine Cover
- 16" Bronze Alloy TRU-STOP Ventilated Reel Brake
- 3,300 ft/lbs Torque Hydraulic Take-up Retriever. (Motor Spooled w/ Reel Brake ILO Cross-Over Relief Valve for Smooth Instant Reel Stoppage)
- 2-7/16" Universal Adapter for Capstan, Collapsible Reel or Slip-Clutch Fiber-Optic Reels
- 7 Inch General Purpose Capstan
- Collapsible Power Reel
- Slip-Clutch Fiber-Optic Pulling Capstan
- Cable Rewind Leveler
- Rotating Arbor Ground
- Aluminum or Stainless Toolbox
- Air Brakes w/ ABS
- 16" Long 6-Bolt Hitch Extension (w/ 52" Safety Chains and Breakaway Cable Extension)
- 3" Lunette Eye
- Wiring Connections Soldered and Sealed w/ Heat Shrink Tubing
- Plug-and-Play Sealco Wiring Harness
- **Wheel Chocks:** Rubber or All Weather Galvanized Grip Strut
- Spare Tire and Mount
- Solar Charged Breakaway Kit
- 12" Caster Wheel for Tongue Jack
- Strobe Warning Lights
- All Stainless Steel Fasteners (1/2" and under)
- Auxiliary Hydraulic Quick-Connect Ports
- Various Trailer Light Plugs (Customer Choice)
- Custom Paint

—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

OPTIONS (cont.)


- Custom Specification
- Truck-Lite Lighting

—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

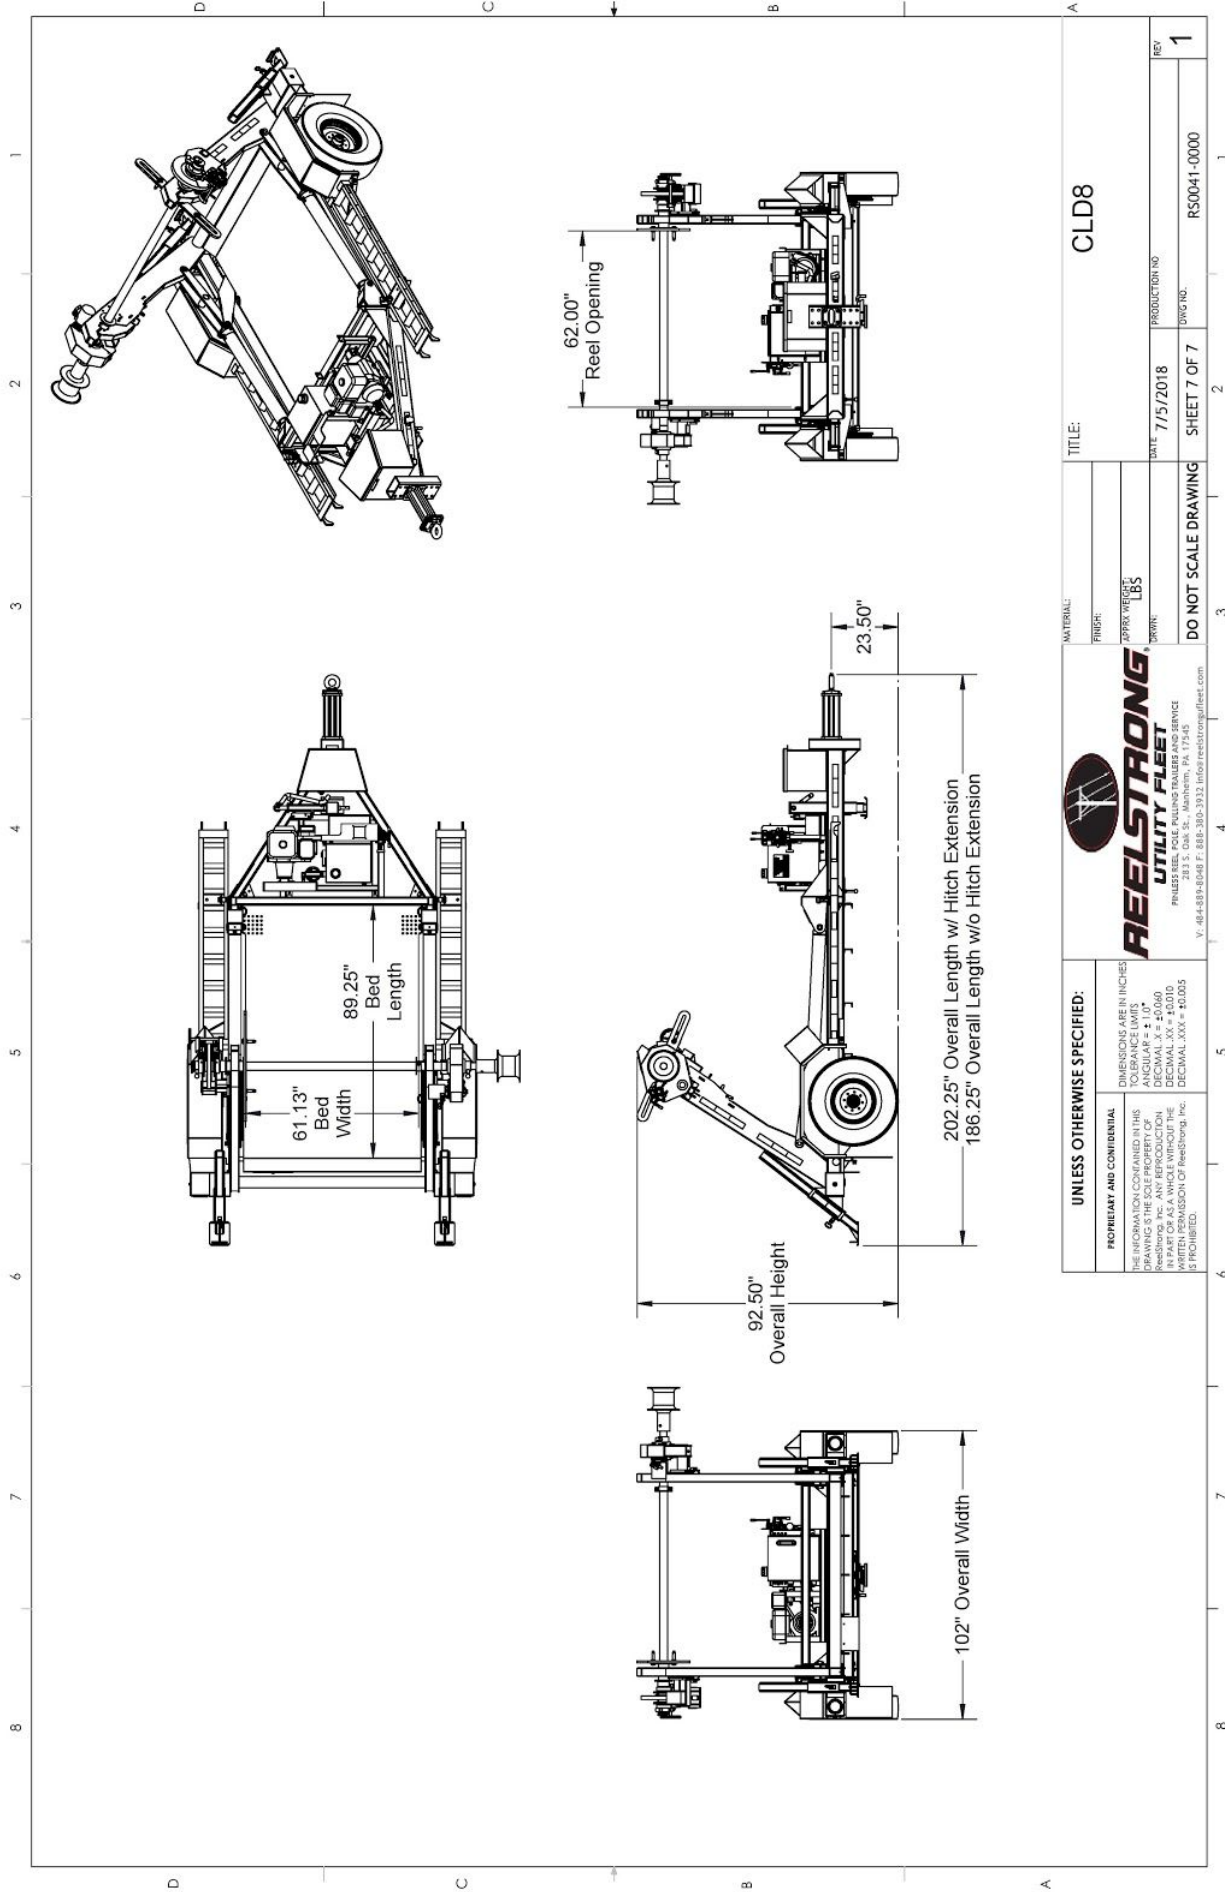

UNLESS OTHERWISE SPECIFIED:		TITLE:		CLD8	
PROPRIETARY AND CONFIDENTIAL		MATERIAL:		DATE:	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF REELSTRONG UTILITY FLEET, INC. ANY REPRODUCTION, IN PART OR AS A WHOLE, WITHOUT THE WRITTEN PERMISSION OF ReelStrong, Inc. IS PROHIBITED.		FINISH:		7/5/2018	
		201XX W/REEL		PRODUCT ID NO.	
		201XX W/REEL		DWG. NO.	
		LBS		SHEET 7 OF 7	
		3000		RSD041-0000	
		DO NOT SCALE DRAWING		REV	
				1	


8 7 6 5 4 3 2 1

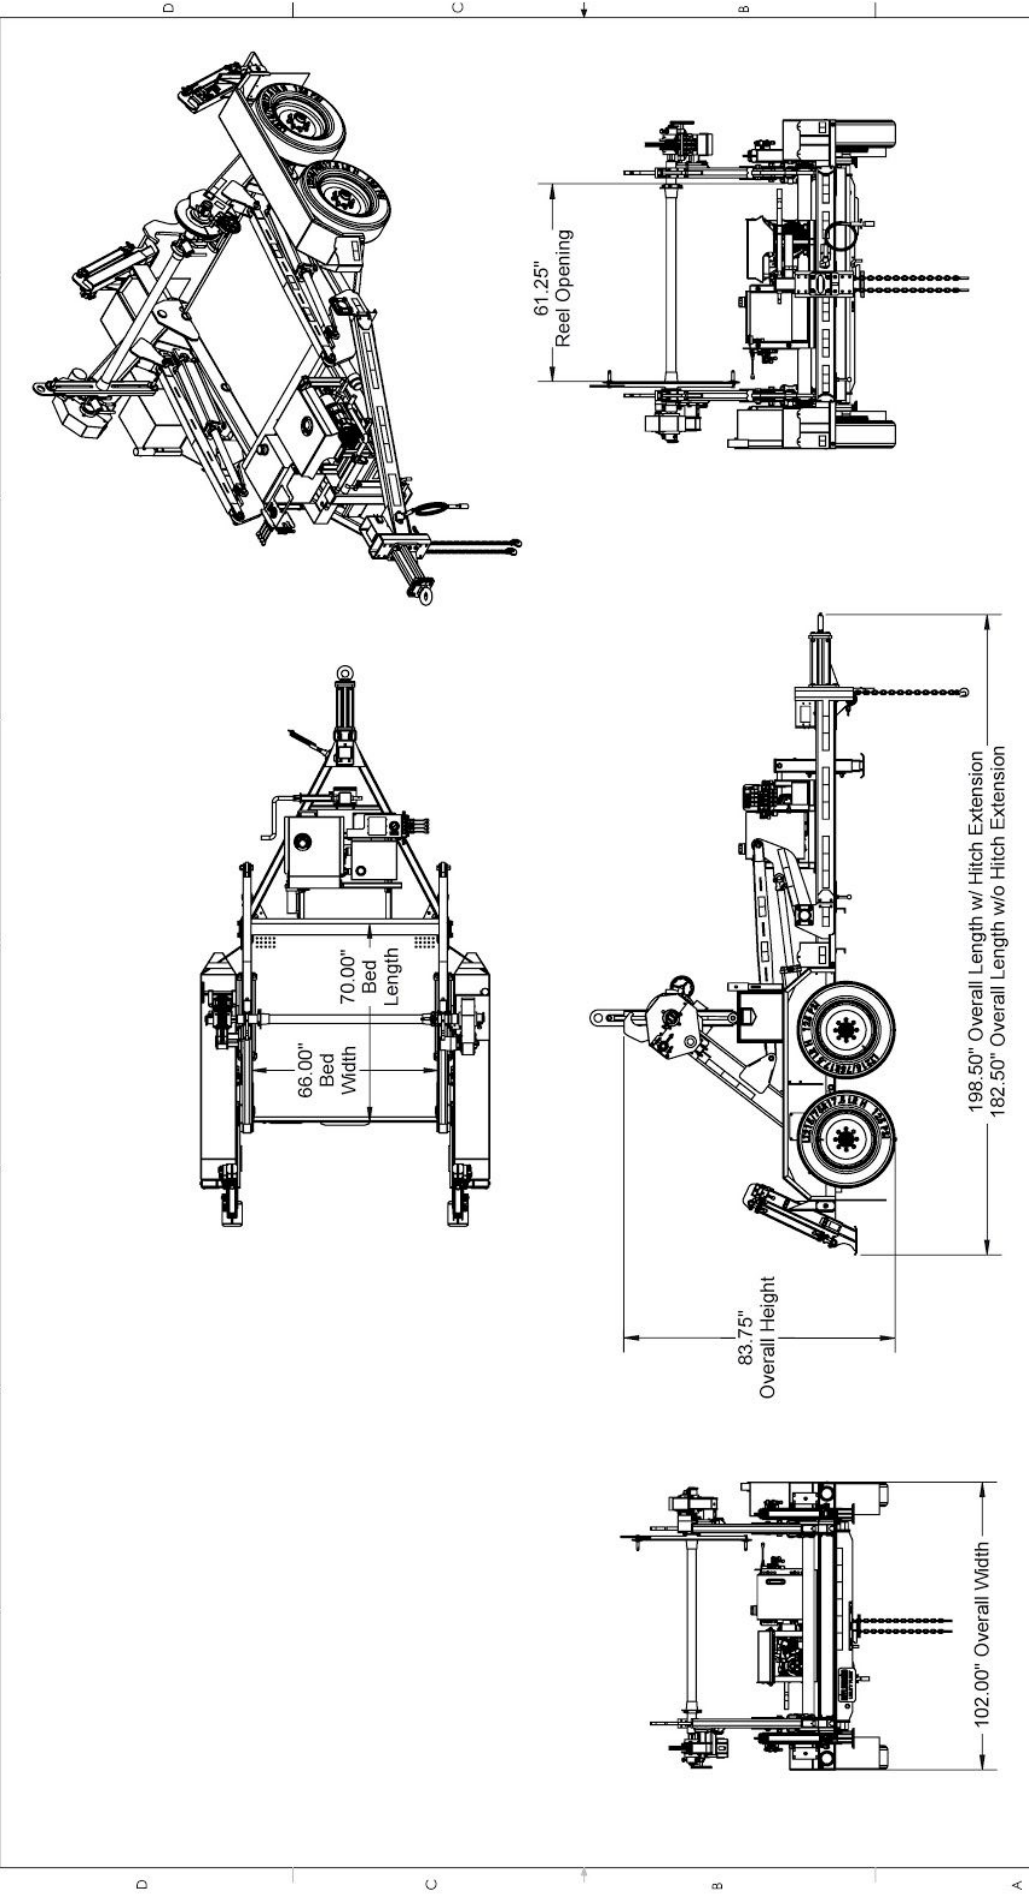

UNLESS OTHERWISE SPECIFIED:		REELSTRONG [®] UTILITY FLEET		TITLE: CLD14	
PROPERTY AND CONFIDENTIAL		DIMENSIONS ARE IN INCHES		MATERIAL:	
THIS INFORMATION IS CONFIDENTIAL		TOLERANCE LIMITS		FINISH:	
DRAWINGS ARE THE SOLE PROPERTY OF		ANGULAR ± 1.0°		APPROX WEIGHT:	
Reelstrong, Inc. ANY REPRODUCTION		DIMENSION ± 0.005		LBS	
OR REUSE WITHOUT THE WRITTEN PERMISSION OF Reelstrong, Inc.		DECIMAL .XX ± 0.010		DATE	
IS PROHIBITED.		DECIMAL .XXX ± 0.005		7/5/2018	
				PART NO.	
				205-000000	
				DRAWING NOT TO SCALE	

8 7 6 5 4 3 2 1

1 2 3 4 5 6 7 8

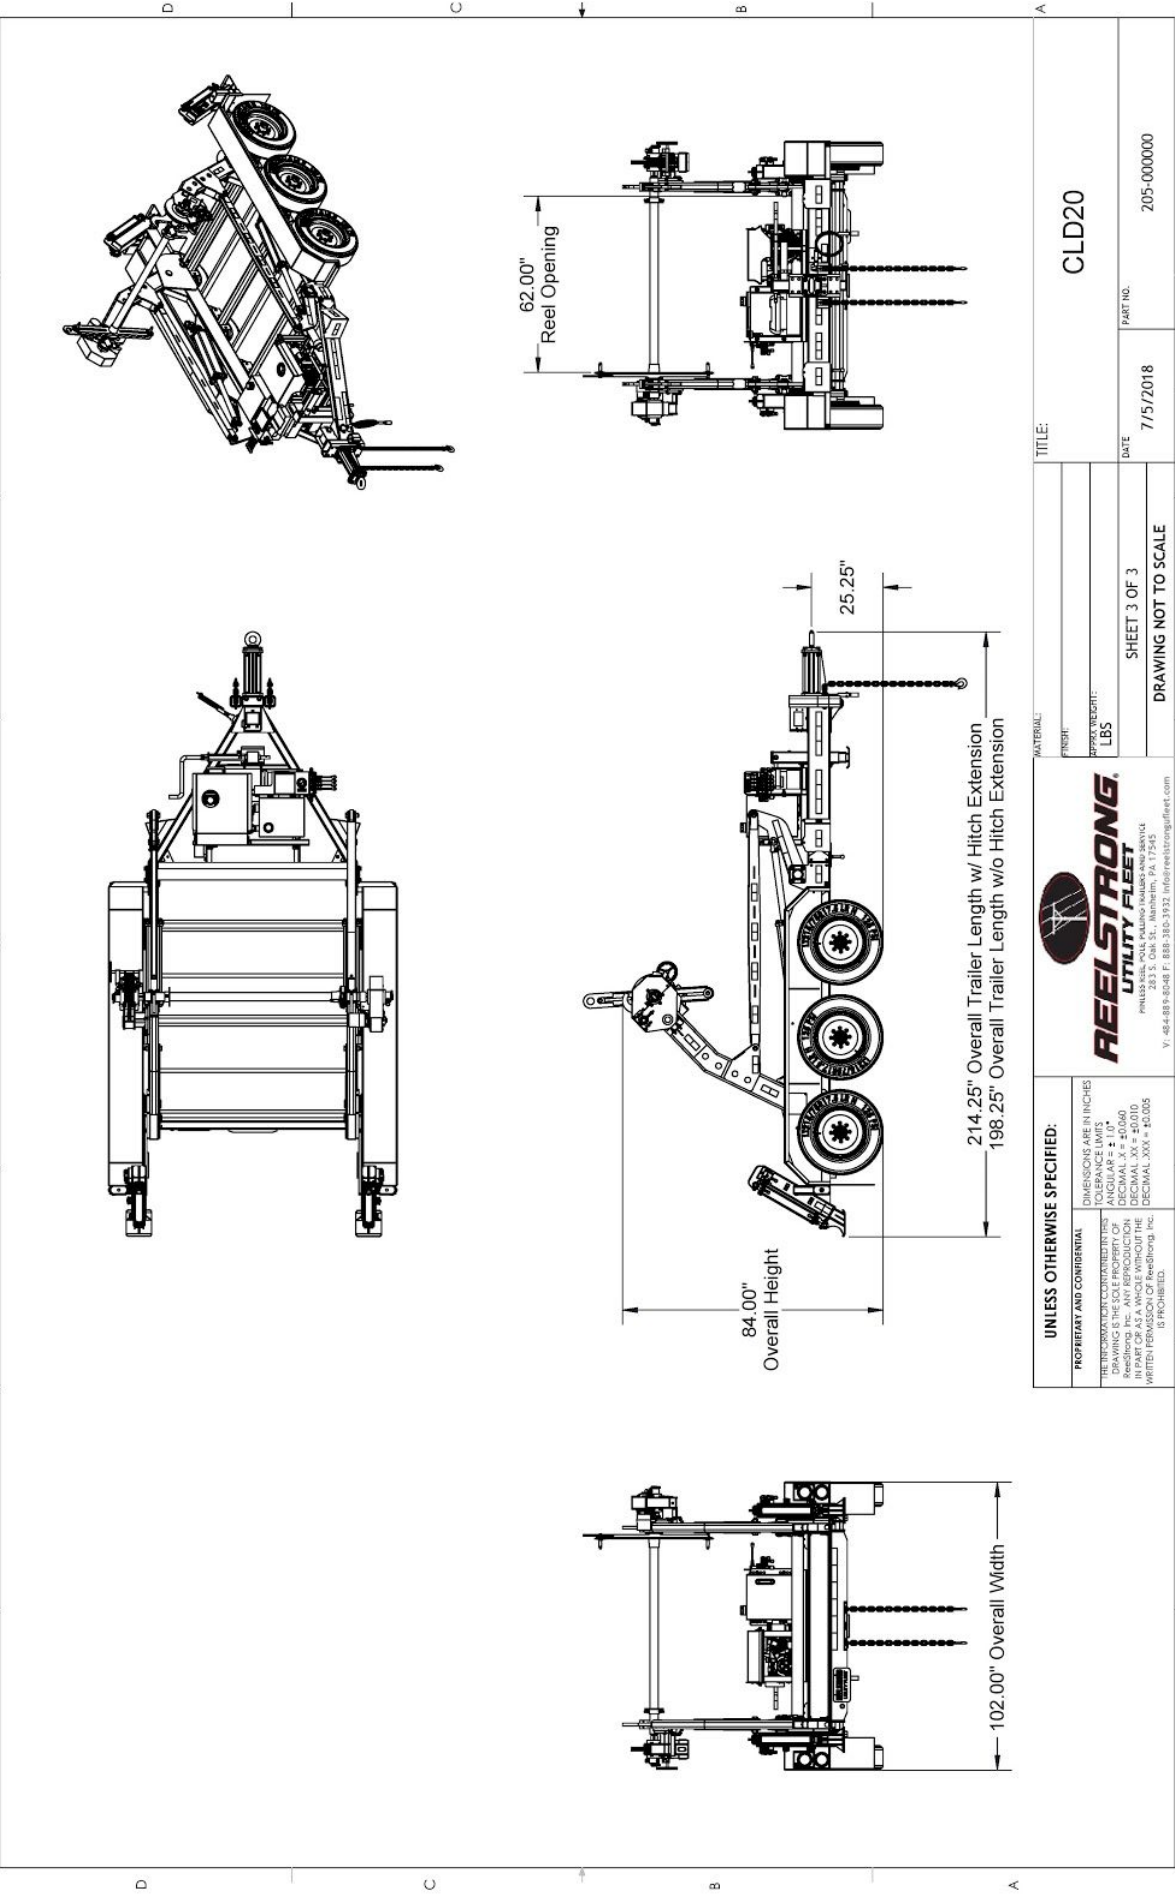

UNLESS OTHERWISE SPECIFIED:

PROPRIETARY AND CONFIDENTIAL
ALL INFORMATION CONTAINED HEREIN IS THE SOLE PROPERTY OF REELSTRONG, INC. ANY REPRODUCTION OR TRANSMISSION OF THIS DRAWING IN ANY FORM OR BY ANY MEANS, WITHOUT THE WRITTEN PERMISSION OF ReelStrong, Inc. IS PROHIBITED.

DIMENSIONS ARE IN INCHES
TOLERANCE LIMITS
FRACTIONAL ± 1/16"
DECIMAL .XX ± 0.010
DECIMAL .XXX ± 0.005



MATERIAL:

FINISH: LBS

PROPERTY WEIGHT:

SHEET 3 OF 3

DRAWING NOT TO SCALE

TITLE: CLD20

DATE: 7/5/2018

PART NO.: 205-000000