




MRST3-RC POWERLOCK™ REEL / CARGO TRAILER SPECS

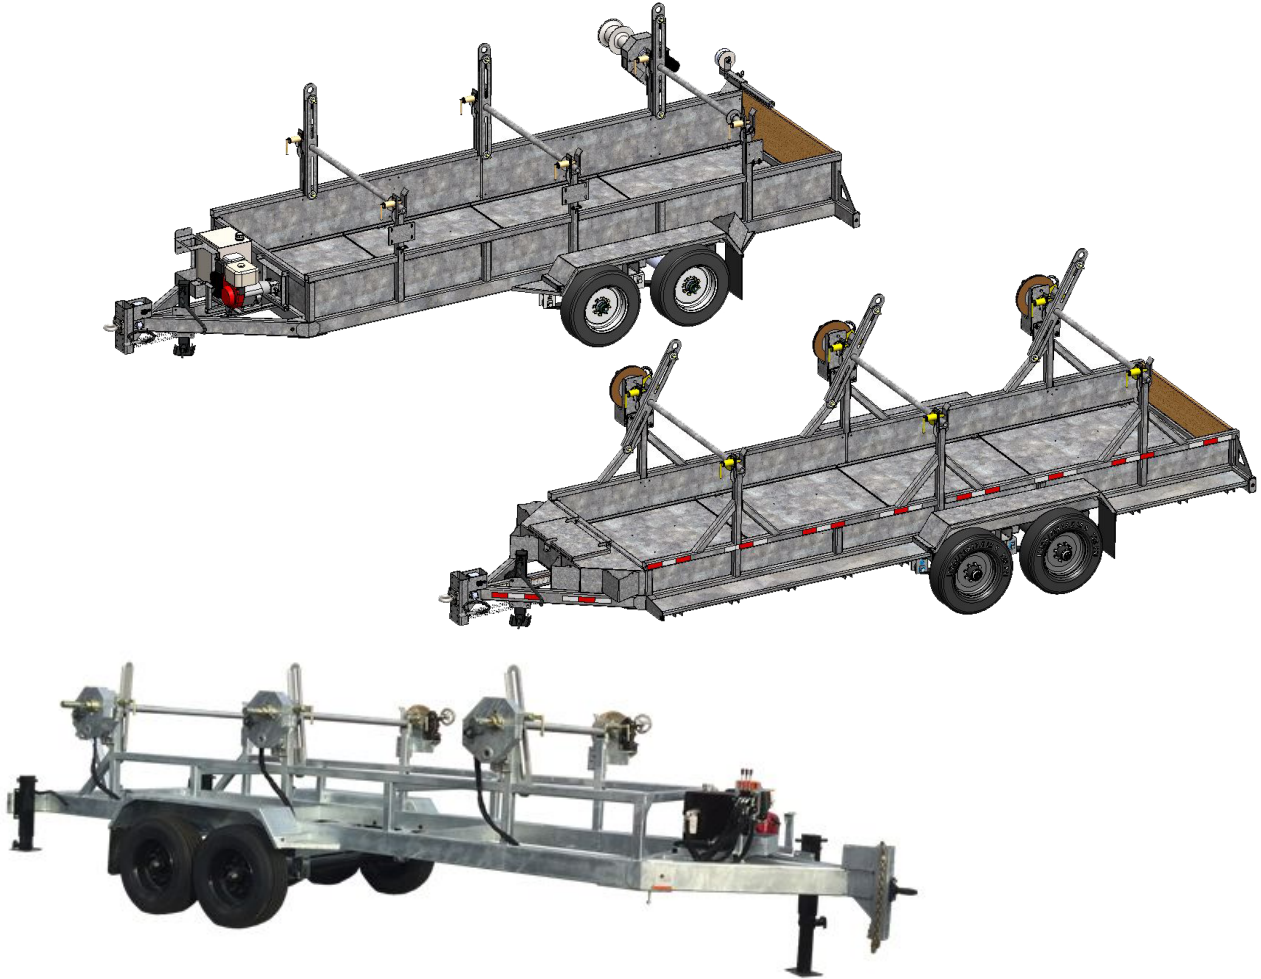

EXCLUSIVE STANDARD ADDED VALUE:

- POWERLOCK™ Technology Provides Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
 - SAFETY and Peace of Mind
 - No Pins, Cotters, or Lanyards that Secure the Reel Arbor (which is the most critical safety point).
 - Faster Reel Loading, Unloading, and Deployment Reduces Labor Costs and Fatigue on Workers.

BUILT FOR SAFETY. BUILT FOR SPEED. BUILT TO LAST.

CAPACITIES

- MRST3-RC-72-60: 22,100 lbs. GVWR @ 15% Tongue Weight
- MRST3-RC-84-60: 27,600 lbs. GVWR @ 15% Tongue Weight

AXLES

- MRST3-RC-72-60: Tandem 10K lbs. Sprung
- MRST3-RC-84-60: Tandem 12K lbs. Sprung

WHEELS

- MRST3-RC-72-60: (4) 17.5 x 6.75 HC / 8 on 6.5 BC w/ 0.19 Inset
- MRST3-RC-84-60: (4) 17.5 x 6.75 HC / 8 on 6.5 BC w/ 0.19 Inset

TIRES

- MRST3-RC-72-60: (4) ST-215/75R17.5 LR-H Tires
- MRST3-RC-84-60: (4) ST-235/75R17.5 LR-H Tires

BRAKES

- MRST3-RC-72-60: 12.25" x 3.38" Electric w/ Safety Breakaway Kit
- MRST3-RC-84-60: 12.25" x 5.00" Electric w/ Safety Breakaway Kit

PAYLOAD: ALL FINAL PAYLOADS BASED ON CHOSEN MODEL AND OPTIONS

REEL / CARGO WEIGHT (PAYLOAD)

- MRST3-RC-72-60: 15,000 lbs. (5,000 lbs. per Reel)
- MRST3-RC-84-60: 20,200 lbs. (6,700 lbs. per Reel)

REEL DIAMETER:

- MRST3-RC-72-60: (3) 72" Maximum
- MRST3-RC-84-60: (3) 84" Maximum

REEL WIDTH: 60" Maximum

REEL SHAFT DIAMETER: 2.50" Tube w/ Centering Collars

OVERALL LENGTH:

- MRST3-RC-72-60: 297" Approx.
- MRST3-RC-84-60: 318" Approx.

OVERALL WIDTH:

- MRST3-RC-72-60: 101"
- MRST3-RC-84-60: 102"

OVERALL WEIGHT: Actual Trailer Weight will Vary with Options & Finishes Chosen.

STANDARD FEATURES

- POWERLOCK™ Technology Provides Industry Leading Safety, Ease of Use, Low Maintenance and Durability.
- Oil Bath Hubs (Greaseable Option All)
- Electric Brakes
- Wheel Chock Holders

STANDARD TRAILER BODY

- MRST3-RC-72-60:
 - Heavy Duty 6" X 3" X ¼"
 - 6-Position Adjustable Hitch
 - ¾" X 36" GR70 Yellow Zinc Safety Chains with Hooks
 - 12,000 lbs. Static Front Jack w/ Spring Return
 - Ground Lug: Copper Alloy Bolted to Frame
 - Fenders: ⅛" Tread Plate
 - Cargo Area: Approx. 66.5" Wide x 220.5" Long x 21" Tall
 - Floor: ⅛" Steel Plate
 - A-frame: 5' Long
- MRST3-RC-84-60:
 - Heavy Duty 5" X 3" X ¼"
 - 6-Position Adjustable Hitch
 - ¾" X 36" GR70 Yellow Zinc Safety Chains with Hooks
 - 12,000 lbs. Static Front Jack w/ Spring Return
 - Ground Lug: Copper Alloy Bolted to Frame
 - Fenders: ⅛" Tread Plate
 - Grip Strut Cat Walks
 - Cargo Area: Approx. 66.5" Wide x 244.88" Long x 15" Tall
 - Floor: ⅛" Steel Plate
 - A-frame: 5' Long

WIRING

- DOT / ICC Approved LED Lights and Conspicuity Reflective Tape
- FMVSS / CMVSS Standard 108 LED Lighting
- Sealed Beam, Rubber Mounted Stop, Turn, Tail and Marker Lights
- 100% Sealed Heat-Shrunked Wiring Connections w/ Full Loom
- Breakaway Kit with Absorbed Glass Mat (AGM) Battery

PAINT

- I.M.P.A.C.T Intense Metal pH Acid Cleaning Technology


—All specifications / designs are subject to change without notice - All GVWR and reel capacities are de-rateable to your needs.

PAINT (cont.)

- Hydrofluoric, Sulfuric, Phosphoric ACID Blend Cleaning Preparation
(Re-used sandblasting material can impregnate metals with oil)
- Seams Caulked
- Rust Preventative 2-Part Epoxy Primer
- Standard Colors: Red, Black, White and CAT Yellow

OPTIONS

- 13 HP HONDA Engine Hydraulic Power Pack Comes STANDARD w/ ENGINE COVER, 15 Gallon Reservoir, Replaceable Oil Filter, Pressure Gauge and Solar Fade Resistant Plastic Control Placard. (Electric Start Optional)
- 10-Year Galvanized Structural Warranty (2-Year Painted)
- 3,300 or 4,800 ft/lbs Hydraulic Take-up Retriever (Comes Standard w/ 2-7/16" Universal Adapter for Capstan and Power Reel Attachments)
- 7 Inch General Purpose Capstan
- Collapsible Power Reel
- Rotating Arbor Ground
- Auxiliary Hydraulic Quick-Connect Ports
- Rewind Leveler
- 16" Bronze Alloy Ventilated Reel Brake
- 9" Stainless Steel Overspin Brake
- 16" Long 6-Bolt Hitch Extension (w/ 52" Safety Chains and Breakaway Cable Extension)
- 3" Lunette Eye
- Aluminum or Steel Toolbox
- 10K-HD / 15K / 20K Axles Available w/ Air Brakes
- Anti-Lock Brakes (ABS)
- Wiring Connections Soldered and Sealed w/ Heat Shrink Tubing
- Plug-and-Play Sealco Wiring Harness
- Wheel Chocks: Rubber or All Weather Galvanized Grip Strut
- Spare Tire and Mount
- Solar Charged Breakaway Kit
- Strobe Warning Lights
- All Stainless Steel Fasteners (1/2" and under)
- Hydraulic Front Jack
- Rear Underground Fairlead Roller Attachment (accommodates wooden plank rear gate)
- Truck-Lite Lighting

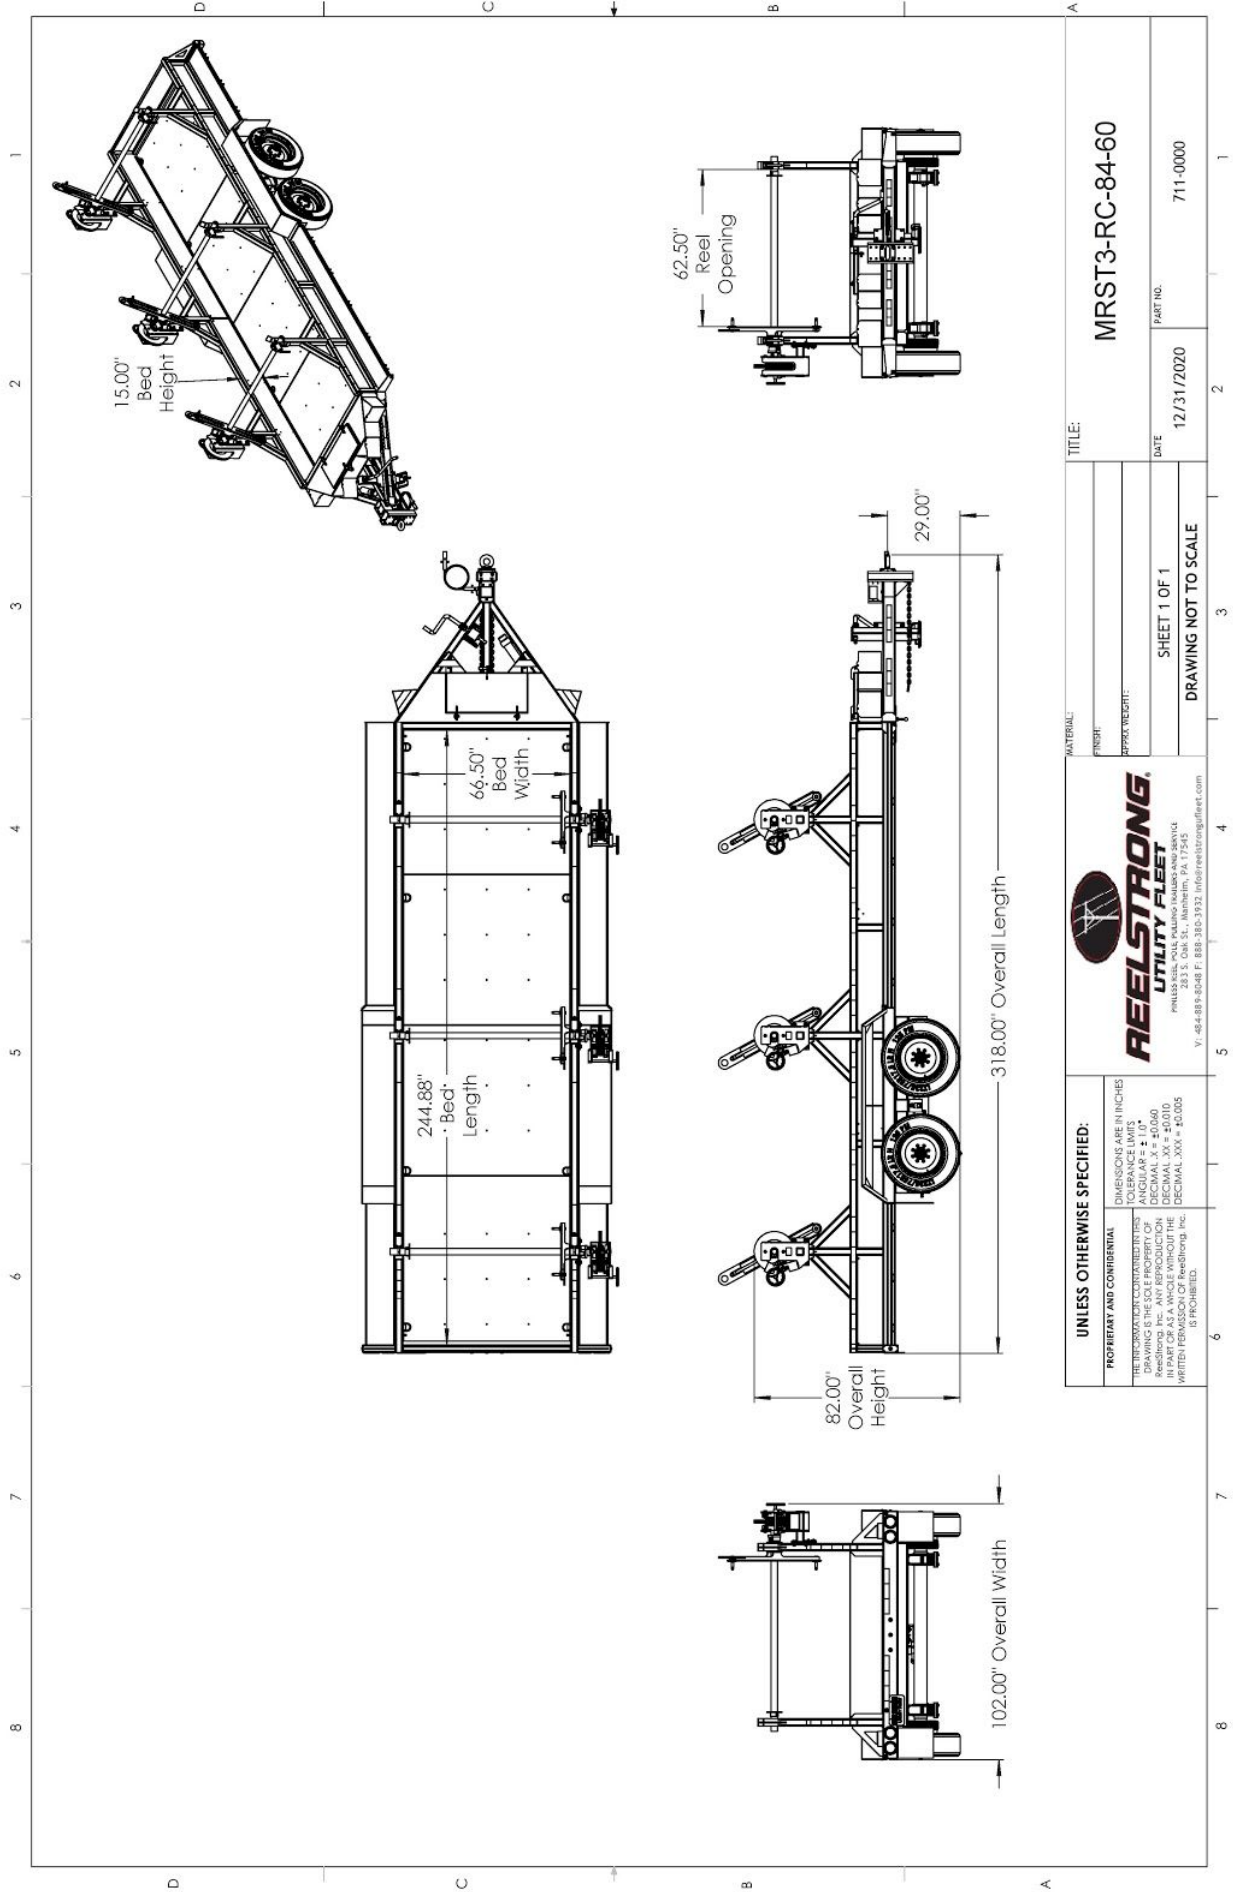

UNLESS OTHERWISE SPECIFIED:		TITLE:	
PROPERTY AND CONFIDENTIAL THIS INFORMATION CONTAINED HEREIN IS THE SOLE PROPERTY OF REELSTRONG, INC. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF ReelStrong, Inc. IS PROHIBITED.	DIMENSIONS ARE IN INCHES	MATERIAL:	
	TOLERANCE LIMITS	FINISH:	
	ANGLES ± 0.0000 DECIMAL .XX ± 0.0010 DECIMAL .XXX ± 0.0005	APPROX WEIGHT:	
SHEET 1 OF 1		DATE	
DRAWING NOT TO SCALE		12/31/2020	
		PART NO.	
		711-0000	



REELSTRONG.
UTILITY FLEET

PHILADELPHIA, PA 19104
283 S. Oak St., Warminster, PA 17045
V: 484-889-6248 F: 888-380-3932 info@reelstrongfleet.com